

# JVC


## SERVICE MANUAL

### STEREO RECEIVER

MODEL **R-K100/R-K100L**



R-K100

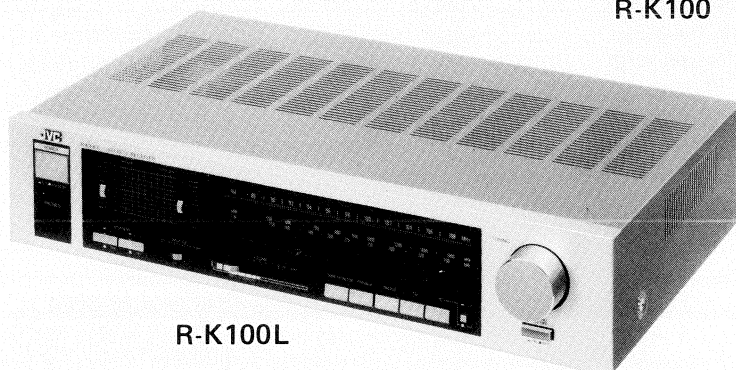

R-K100L

## Contents

Safety Precautions	1-1	Parts List	Separate-volume Insertion
1. Specifications	1-2	5. R-K100/R-K100L Schematic Diagram	
2. Removal Procedures		5-(1) R-K100 Tuner Section	1-6
2-(1) Removing the Bottom Cover	1-3	5-(2) R-K100(G) Tuner Section	
2-(2) Removing the Power Amplifier		(for West Germany only)	1-7
(STK4141II)	1-3	5-(3) R-K100L Tuner Section	1-8
2-(3) Removing the Dial Pointer	1-3	5-(4) R-K100/R-K100L Amplifier Section	1-9
3. Dial Stringing Procedure	1-4	6. Servicing method for AWG #20 wires with	
4. FM/MW (LW) Tuner Alignment Procedures	1-5	clamping terminals	1-10
4-(1) FM Section	1-5		
4-(2) MW (LW) Section	1-5		

# Safety Precautions

1. The design of this product contains special hardware, many circuits and components specially for safety purposes.  
For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
2. Alterations of the design or circuitry of the product should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
3. Many electrical and mechanical parts in the product have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. Electrical components having such features are identified by shading on the schematics and by (  $\Delta$  ) on the parts list in Service manual. The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list in Service manual may create shock, fire, or other hazards.
4. The leads in the products are routed and dressed with ties, clamps, tubings, barriers and/or the like to be separated from live parts, high temperature parts, moving parts and/or sharp edges for the prevention of electric shock and fire hazard.  
When service is required, the original lead routing and dress should be observed, and they should be confirmed to be returned to normal, after re-assembling.

## 5. Leakage current check

(Safety for electrical shock hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the Products (antenna terminals, knobs, metal cabinet, screw heads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

Do not use a line isolation transformer during this check.


- Plug the AC line cord directly into the AC outlet. Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5 mA AC (r.m.s.).

- Alternate check method.

Plug the AC line cord directly into the AC outlet. Use an AC voltmeter having 1,000 ohms per volt or more sensitivity in the following manner. Connect a 1500  $\Omega$  10 W resistor paralleled by a 0.15  $\mu$ F AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.).

Measure the AC voltage across the resistor with the AC voltmeter.


Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75 V AC (r.m.s.). This corresponds to 0.5 mA AC (r.m.s.).

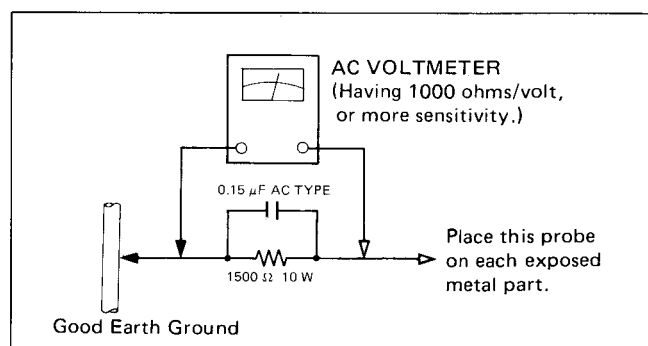

## CHECKING YOUR LINE VOLTAGE (Except for U.S.A., Canada, Australia, U.K. and Continental Europe.)

Before inserting the power plug, please check this setting to see that it corresponds with the line voltage in your area. If it doesn't, be sure to adjust the voltage selector switch to the proper setting before operating this equipment. The voltage selector switch is located on the rear panel.

**CAUTION** Before selecting the "Voltage selector switch" to proper voltage disconnect the power plug.



# 1. Specifications

## FM TUNER SECTION

	'78 IHF	DIN (for Europe)
Tuning Range	: 88 MHz — 108.0 MHz	87.5 MHz-108.0 MHz
Usable Sensitivity	: Mono 10.8 dBf 0.95 $\mu$ V/75 ohms 1.9 $\mu$ V/300 ohms	(S/N 26 dB) 1.5 $\mu$ V/75 ohms 3 $\mu$ V/300 ohms
50 dB Quieting Sensitivity	: Mono 17.3 dBf (4.0 $\mu$ V/300 ohms) Stereo 38.3 dBf (45 $\mu$ V/300 ohms)	—
S/N 46 dB Stereo Sensitivity	: —	Stereo 30 $\mu$ V /75 ohms
Signal to Noise Ratio	: Mono 76 dB Stereo 70 dB (A-net)	Stereo 60 $\mu$ V/300 ohms Mono 70 dB Stereo 63 dB (weighted)
Total Harmonic Distortion 1kHz	: Mono 0.15 % Stereo 0.3 %	—
Frequency Response	: 30 Hz — 12.5 kHz, +0.5 dB — 3 dB	1.0 dB
Capture Ratio	: 1.5 dB	55 dB $\pm$ 300 kHz
Alternate Channel Selectivity	: 60 dB $\pm$ 400 kHz	—
Image Response Ratio	: 55 dB at 98 MHz	—
IF Response Ratio	: 85 dB at 98 MHz	—
Stereo Separation	: 40 dB at 1 kHz	—

## MW Tuner Section

Tuning Range	: 525 kHz — 1605 kHz
Usable Sensitivity (at 1000 kHz)	: 300 $\mu$ V/m, 50 $\mu$ V (External Antenna)
Signal to Noise Ratio	: 50 dB
Distortion	: 0.5 % at 100 mV/m
Selectivity	: 23 dB, $\pm$ 10 kHz 20 dB, $\pm$ 9 kHz

## LW Tuner Section

Tuning range	: 150 kHz — 350 kHz
Usable Sensitivity	: 400 $\mu$ V/m, 70 $\mu$ V (External Antenna)
Signal to Noise Ratio	: 50 dB at 245 kHz 100 mV/m
Distortion	: 0.5 % at 245 kHz 100 mV/m
Selectivity	: 30 dB, $\pm$ 9 kHz at 245 kHz

## Amplifier Section

**RMS Power : 25 watts per channel min. RMS, both channels driven, into 8 ohms from 40 Hz to 20 kHz, with no more than 0.5 % total harmonic distortion.**

Input Sensitivity/Impedance		
PHONO	: 2.5 mV/47 kohms	
TAPE PLAY/DAD/AUX	: 140 mV/40 kohms	
Recording Output level	: 140 mV	
Frequency Response		
PHONO (RIAA Equalization)	: 20 Hz — 20 kHz, +1 dB, -1 dB	
TAPE PLAY/DAD/AUX	: 15 Hz — 40 kHz, +1 dB, -1 dB	
Tone Control		
Bass	: $\pm$ 8 dB at 100 Hz	
Treble	: $\pm$ 8 dB at 10 kHz	
Signal to Noise Ratio		
PHONO	: 70 dB ('66 IHF)	59 dB (DIN)
	78 dB ('78 IHF) (Rec out)	
TAPE PLAY/DAD/AUX	: 91 dB ('66 IHF), 74 dB ('78 IHF)	64 dB (DIN)

## Power Specifications

Areas	Line Voltage & Frequency	Power Consumption
U.S.A. & Canada	AC 120 V, 60 Hz	100 watts, 130 VA
Continental Europe	AC 220 V $\sim$ , 50 Hz	80 watts
U.K. & Australia	AC 240 V $\sim$ , 50 Hz	80 watts
Other Areas	AC 110/120/220/240 V $\sim$ , Selectable, 50/60 Hz	80 watts

## Dimensions and Weight

Dimensions			Weight
Height	Width	Depth	Net
92 mm (3-5/8")	435 mm (17-1/8")	303 mm (11-15/16")	4.6 kg (10.1 lbs)

## 2. Removal Procedures

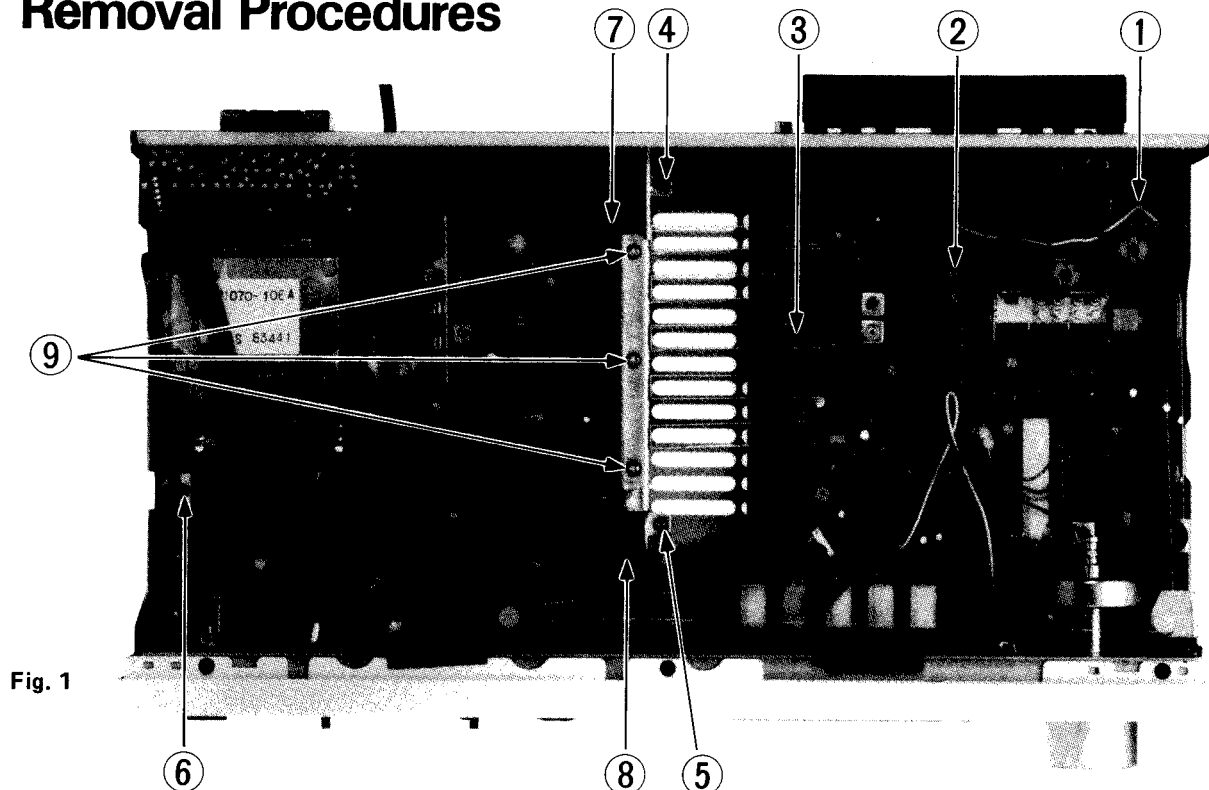


Fig. 1

### 2-(1) Removing the Bottom Cover

- Step 1: Remove three screws ① through ③ which secure the tuner PC board (See Fig. 1).
- Step 2: Remove three screws ④ through ⑥ which secure the amplifier PC board and the heat sink (See Fig. 1).
- Step 3: Remove eleven screws which secure the bottom cover.
- Step 4: Detach two fasteners ⑩ which retain in place the amplifier PC board (See Fig. 2).
- After completing the above steps, the bottom cover can be demounted as shown in Fig. 2.

### 2-(2) Removing the Power Amplifier (STK4141II)

Conduct above steps 1 through 4 of preceding Section 2-(1).

- Step 4: Remove five screws ⑦ through ⑨ which secure the amplifier PC board to the heat sink.
- Step 5: Detach the power amplifier from the amplifier PC board by peeling off the soldered section.

After completing the above steps, the power amplifier (STK4141II) can be demounted.

### 2-(3) Removing the Dial Pointer

- Step 1: Demount the front panel (Remove the three screws from the front panel lower side and three plastic rivets from the front panel upper side).
- Step 2: Move the dial pointer to the right-hand edge (to the higher-frequency side) by rotating the tuning knob.
- Step 3: Remove the dial pointer by inclining it 90 degrees to the right.

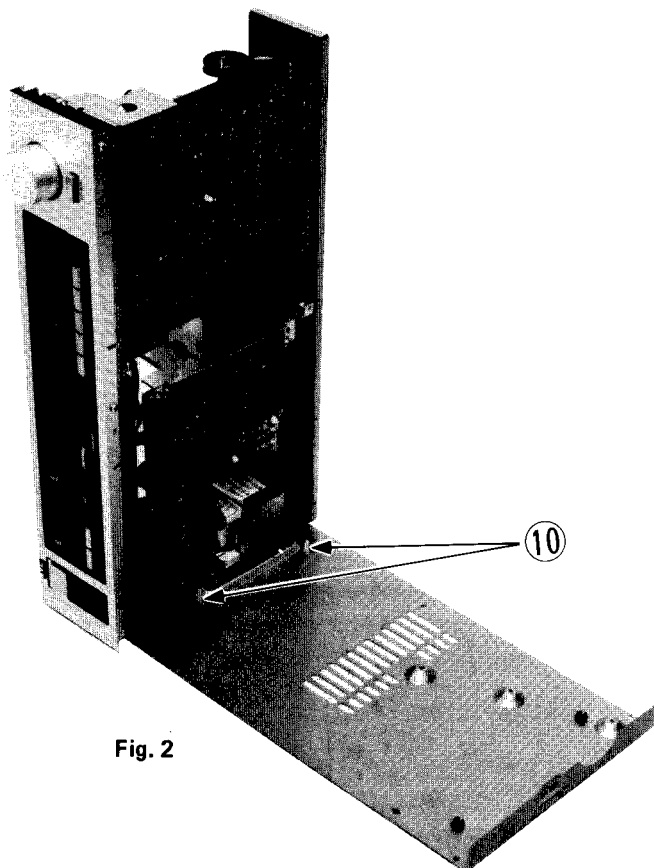


Fig. 2

### 3. Dial Stringing Procedure

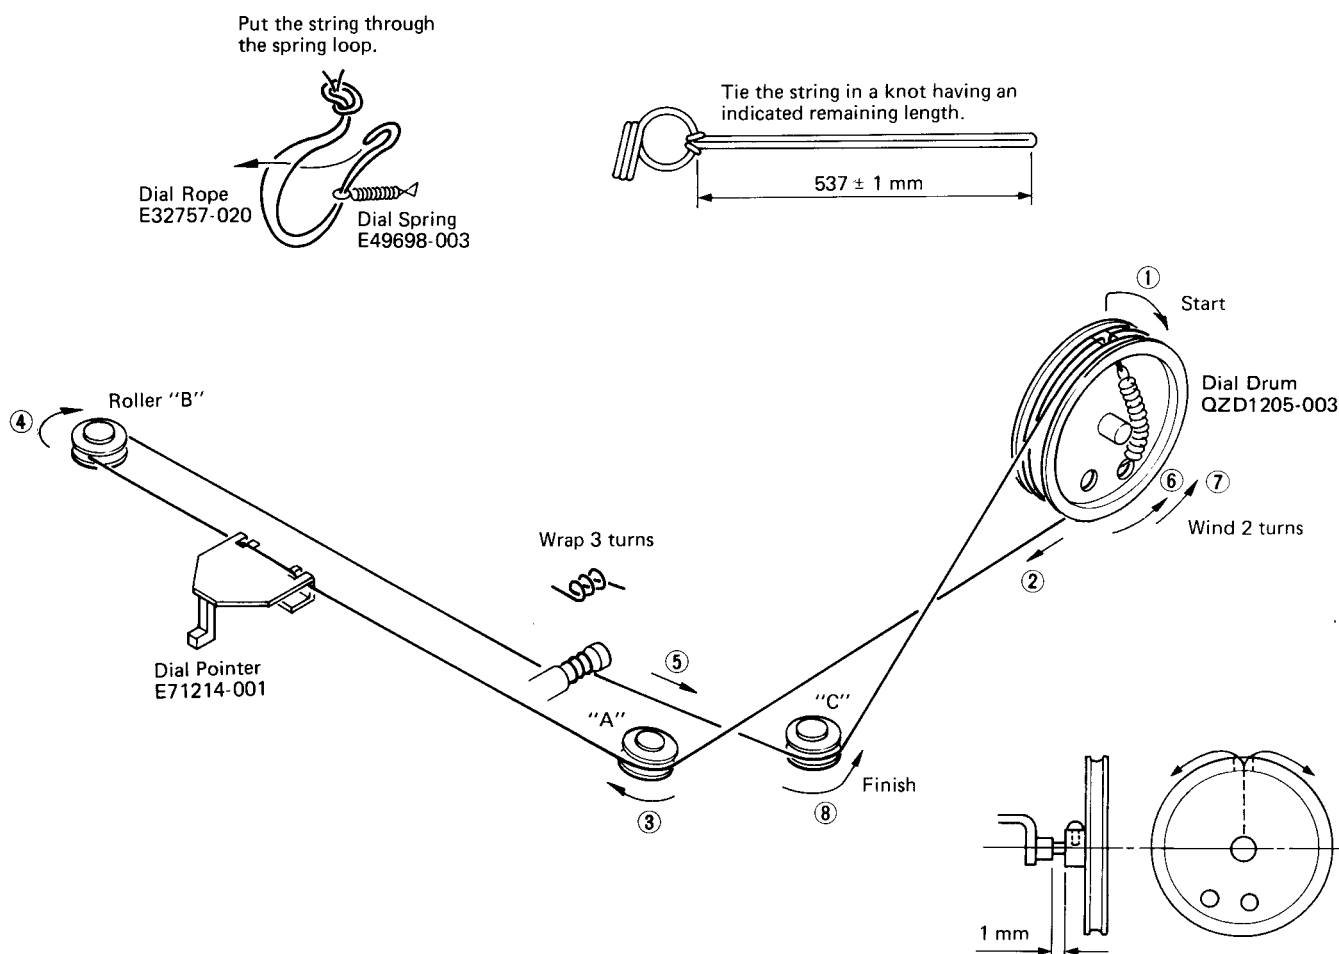


Fig. 3

- (1) Remove dial pointer and old cord.
- (2) Tie end of new dial cord to one end of dial spring, connect the other end of dial spring of bottom right eye inside dial drum.
- (3) Rotate the tuning capacitor dial drum to its maximum counterclockwise.
- (4) Run the dial cord through the slot in the rim of the dial drum. See step (1).
- (5) Guide the dial cord around, over and under rollers "A" and "B". Keep the dial cord taut during this procedure. See step (2) to (4).
- (6) Pull the dial cord taut and wrap 3 turns counterclockwise around tuning shaft. See step (5).
- (7) Guide the dial cord over the dial drum and wind 2 turns counterclockwise. See step (6) and (7).
- (8) Pull the dial cord taut and set it around roller "C". See step (8).
- (9) Turn the tuning shaft to rotate the dial drum fully counterclockwise and fully clockwise to distribute the tensioning along the dial cord.
- (10) Place the dial cord over and under the tabs on the rear of the dial pointer and place the dial pointer on the top of the dial rail.
- (11) Turn the tuning shaft clockwise. Slide the dial pointer to zero (0) calibration marker on the logging scale while holding tuning shaft fully clockwise. Cement the dial pointer to the dial cord to prevent slippage. Allow cement to dry thoroughly.

## 4. FM/MW (LW) Tuner Alignment Procedures

### 4-(1) FM Section

Alignment Location on ENA-021 Tuner P.C. Board Ass'y.

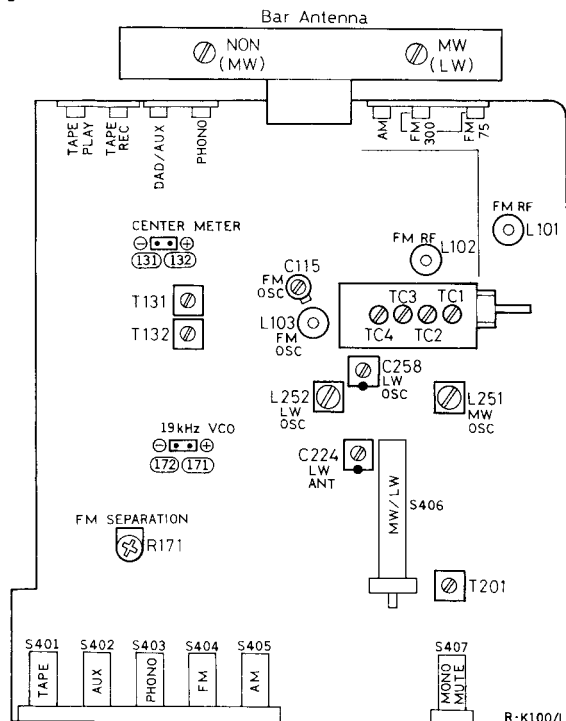


Fig. 4

#### Discriminator, Center Meter, Distortion and Signal Gain

1. Set to FM.
2. Connect an RF generator, 1 kHz modulation and 75 kHz deviation, to the antenna terminals on the rear panel through a dummy antenna.
3. Connect an Oscilloscope, Distortion Meter and VTVM to the Rec. Out jacks on the rear panel.
4. Tune to a frequency where there is no broadcasting.
5. Connect a DC VTVM between TP132 and 131.
6. Adjust the core of T131 for DC VTVM reading of 0 (zero) mV.
7. Set the RF generator to 98 MHz.
8. Set the dial pointer to 98 MHz.
9. Adjust the core of T132 so that the distortion is minimized at a value less than 0.4 %.

#### Tracking and Sensitivity

**Precaution:** No adjustment is necessary. The tracking and sensitivity have been adjusted properly and completely at the factory. If any special reason occasioned, take the following procedures carefully.

#### Low Frequency

1. Connect an RF generator to the antenna terminals on the rear panel through a dummy antenna.
2. Set the RF generator to 88 MHz, a modulation of 1 kHz and a deviation of 75 kHz to provide an input of  $2 \mu\text{V}$ .
3. Connect a VTVM and an Oscilloscope to the Rec. Out jacks on the rear panel.
4. Set the dial pointer to 88 MHz.
5. Adjust the three coils L103, L102 and L101 in the tuning gang to maximize the output.

#### High Frequency

6. Set the RF generator to 108 MHz, a modulation of 1 kHz and a deviation of 75 kHz, to provide an input of  $2 \mu\text{V}$ .
7. Set the dial pointer to 108 MHz.
8. Adjust the FM trimmers C115, TC3 and TC1 in the tuning gang to maximize the output.
9. Repeat these high and low frequency adjustments alternately until maximum sensitivity is obtained.

**Note:** After adjustment, confirm that the band cover is as follows: (for West Germany only)

FM: Lower 87.5 MHz -300 kHz, Higher 108.0 MHz -100 kHz

#### Separation (for Europe only)

1. Set the stereo signal generator as follows: 400 Hz modulation frequency, 7.5 kHz deviation pilot, 67.5 kHz main and sub carriers. Connect its output to an RF generator.
2. Connect the RF Generator to the antenna terminal through a dummy antenna.
3. Connect a VTVM, an Oscilloscope and a Distortion Meter to Signal Cord.
4. Set the RF Generator to the 98 MHz and an output of 1 mV.
5. Set the dial pointer to 98 MHz.
6. Switch the selector of the Stereo Modulator to Left channel modulation.
7. Adjust VR171 so that the output of the Right channel is minimized.
8. Switch the selector of the modulator to Right channel modulation.
9. Adjust VR171 so that the Left channel is minimized.
10. Set VR171 to average, if the separation of Right and Left are different.

### 4-(2) MW (LW) Section

**Note:** ( ) shows LW Alignment Procedures

#### Tracking and Sensitivity

##### Low Frequency


1. Connect the RF generator to the antenna terminals on the rear panel, set this to 600 kHz (160 kHz) with 30 % modulation at 400 Hz.
2. Connect an AC VTVM and an oscilloscope to the Rec. out jacks on the rear panel.
3. Set the dial pointer to 600 kHz (160 kHz).
4. Adjust OSC coil L251 (L252) and the ferrite bar antenna core to maximize the output signal. Left ferrite bar is for MW (right ferrite bar is for LW).

##### High Frequency

5. Set the RF generator to 1400 kHz (350 kHz) with 30 % modulation at 400 Hz.
6. Set the dial pointer to 1400 kHz (350 kHz).
7. Adjust the trimmers TC2 (C224) and TC4 (C258) in the tuning gang so that the output signal is maximized.
8. Repeat these high and low frequency adjustment procedures alternately until maximum sensitivity is obtained.

# 5. R-K100/R-K100L Schematic Diagram

## 5-(1) R-K100 Tuner Section

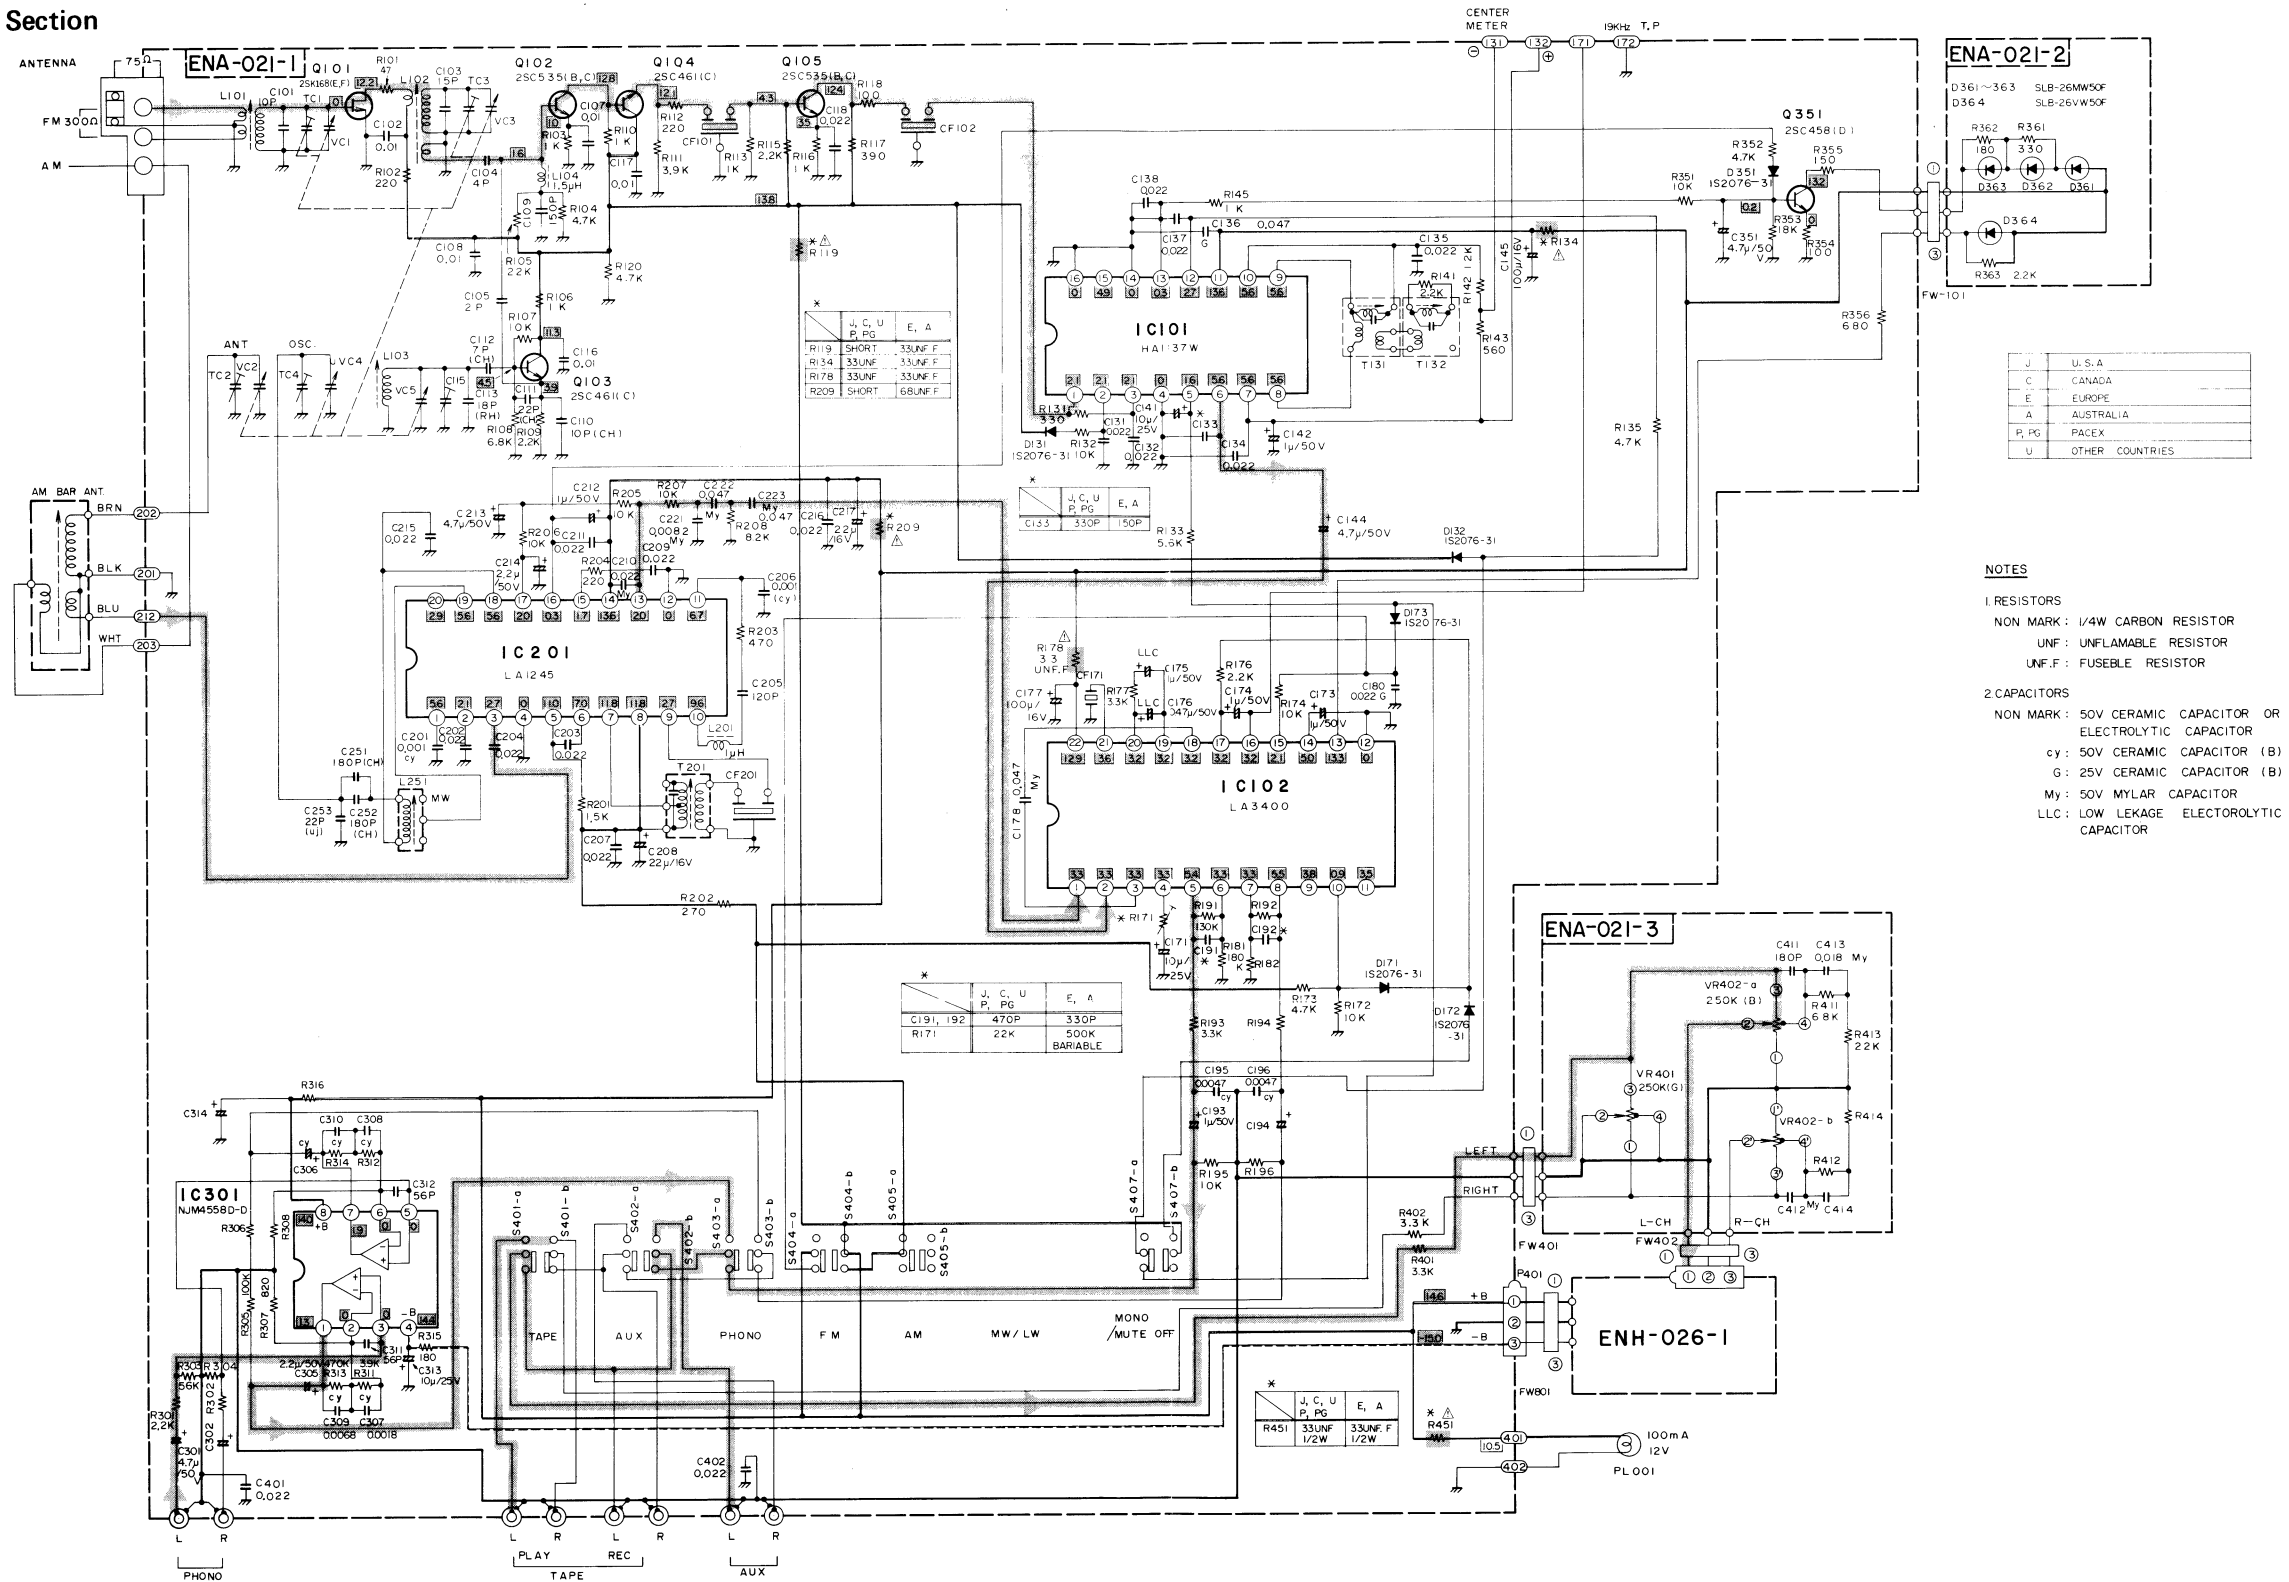

### Notes:


1. shows DC voltage to the chassis with no signal input.
2. indicates positive B power supply.
3. indicates negative B power supply.
4. indicates signal path.

5. When replacing the parts in the darkened area ( ) and those marked with , be sure to use the designated parts to ensure safety.
6. This is the standard circuit diagram.  
The design and contents are subject to change without notice.






## 5-(3) R-K100L Tuner Section

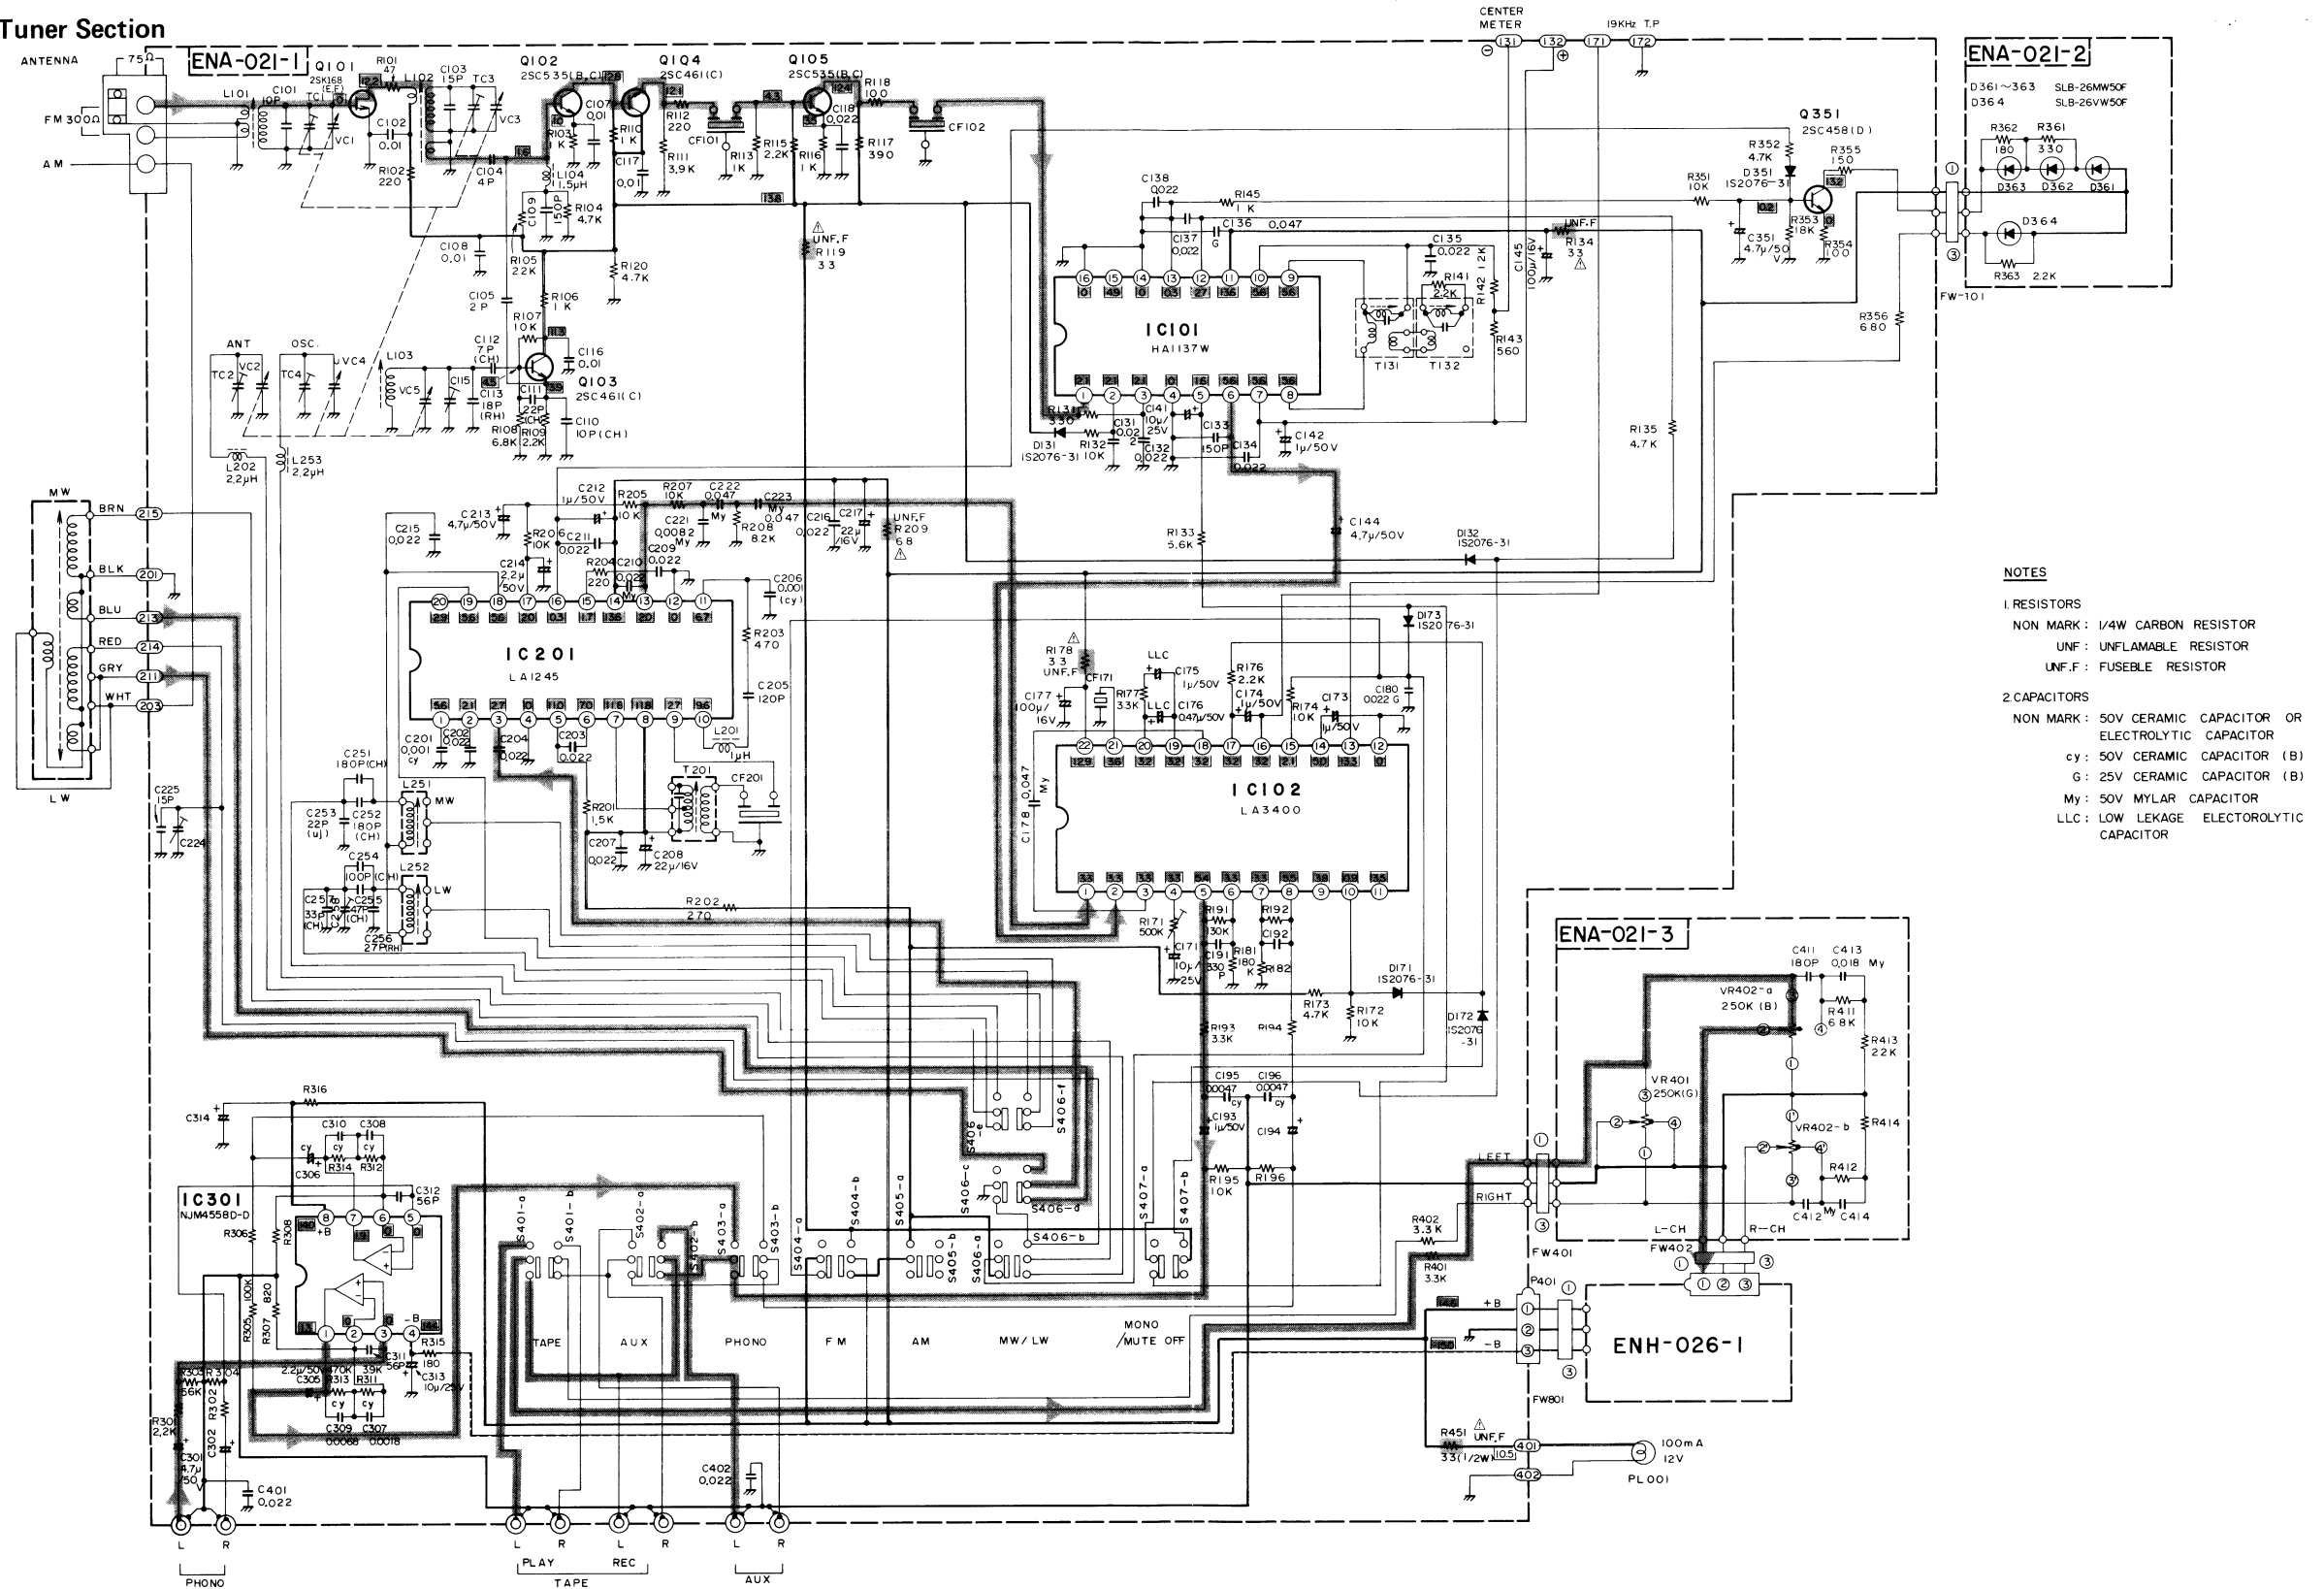**Notes:**

1. shows DC voltage to the chassis with no signal input.
2. indicates positive B power supply.
3. indicates negative B power supply.
4. indicates signal path.

5. When replacing the parts in the darkened area ( ) and those marked with  $\Delta$ , be sure to use the designated parts to ensure safety.
6. This is the standard circuit diagram.  
 The design and contents are subject to change without notice.

# 5-(4) R-K100/R-K100L Amplifier Section

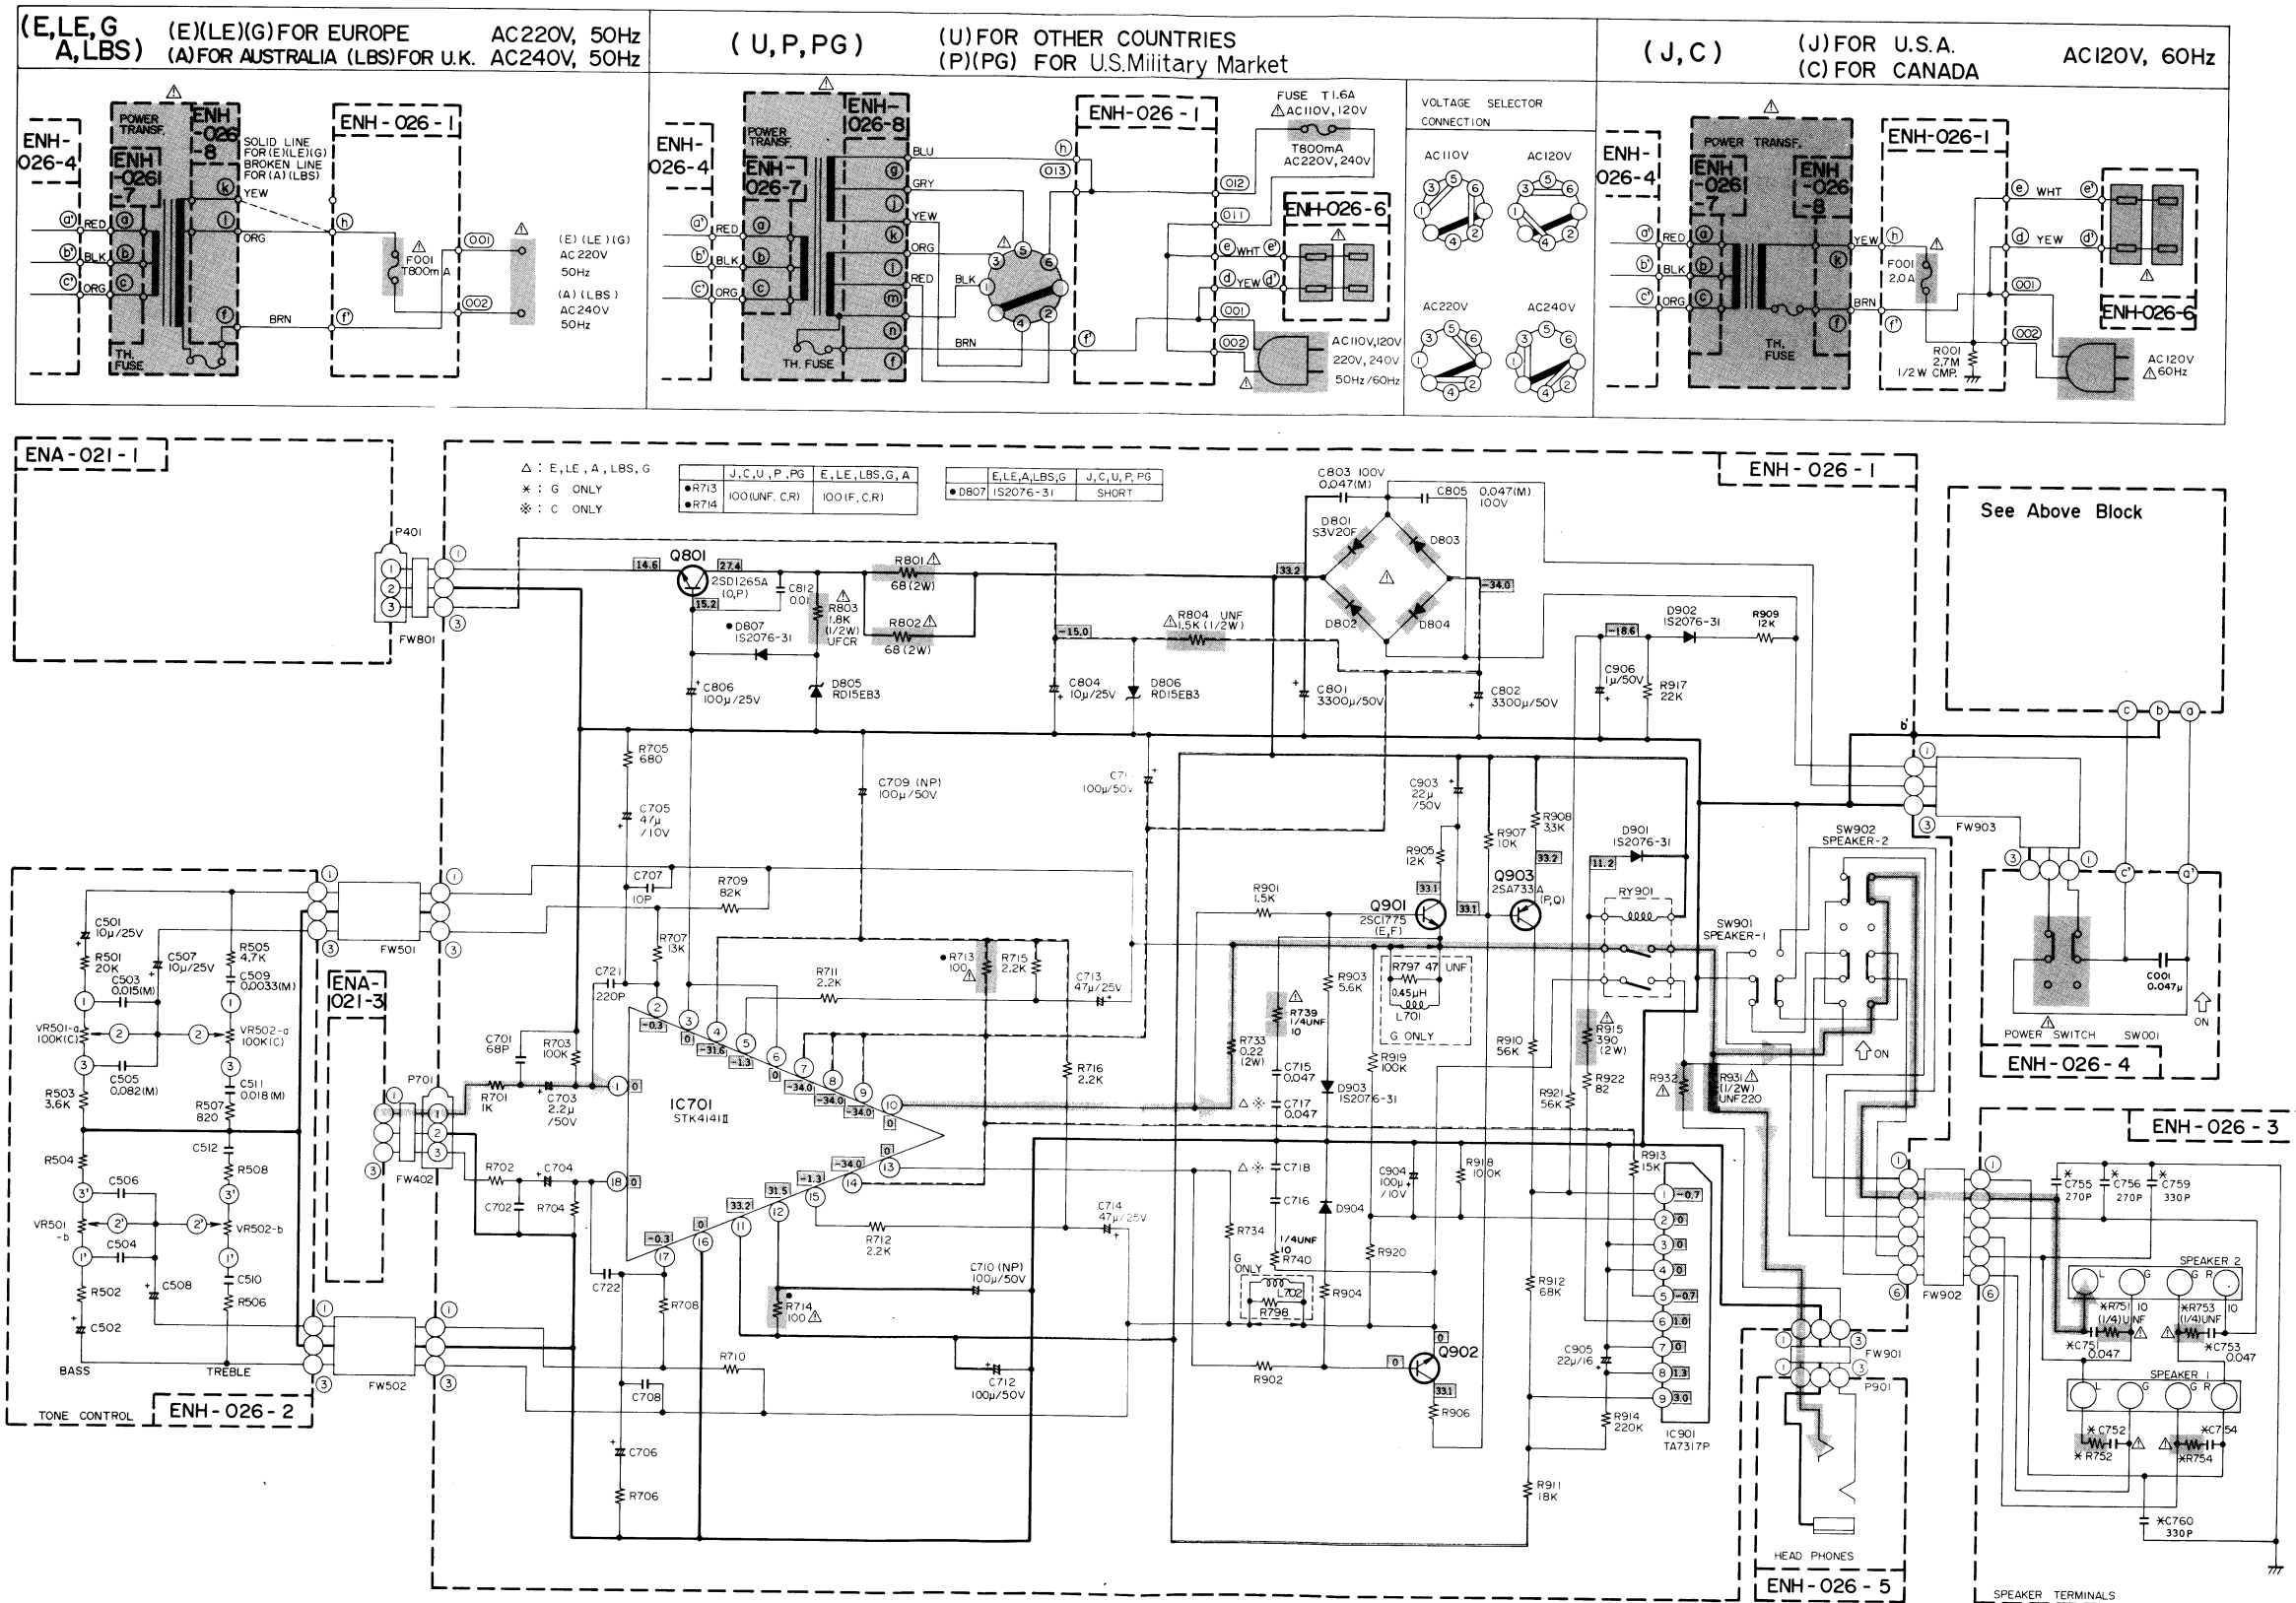

## 6. Servicing Method For AWG #20 Wires With Clamping Terminals


- (1) Application objective  $\Rightarrow$  Confirmation of safety  
Used to prevent breakage/disconnection troubles of primary and secondary wires within PC boards (or between PC boards). Even when wire breakage/disconnection has actually occurred, a safe air-gap distance between the primary wire and the secondary wire/possibly contacting metal surface can be maintained because the terminal retains the wire sheathing.

(2) Type of wire used

- ① 1015 AWG-#20 (single-coated)
- ② 1672 AWG-#20 (double-coated)


(3) Servicing precautions

- ① The structural design of this terminal causes its catch to hook onto the PC board, preventing the wire from being easily pulled out. As shown in the figure, use cutting pliers or a similar tool to cut off the ends of the terminal and wire; then remove the remaining terminal clip by melting the soldering.

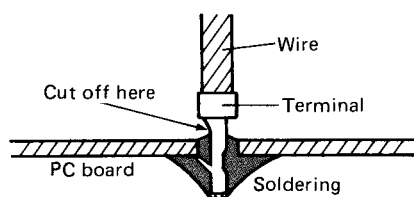


- ② Prior to soldering the wire onto the PC board, confirm safety by pressure-fitting the terminal to the wire by observing the following procedures.

1. Strip off the wire 5 ~ 6 mm from its end.




2. Insert the wire until its sheathing contacts section "A" of the terminal and pressure-fit the terminal clamp at three sections of (a), (b), and (c) (section (c) is especially important to assure safety. Exercise particular care to achieve secure clamping).

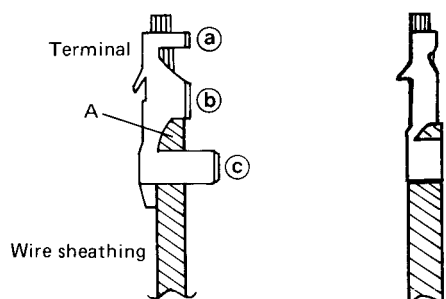

③ Part No., and name

Part No. : 5298T  
Name : CRIMP PIN

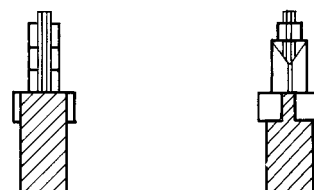


# PARTS LIST

## Contents


- 1. Main Parts Locations . . . . . 2-2
- 2. Exploded View and Part Numbers . . . . . 2-3
- 3. Printed Circuit Board Ass'y and Parts List . . . . . 2-6
  - 3-(1) ENA-021 Tuner P.C. Board Ass'y . . . . . 2-6
  - 3-(2) ENH-026 Amplifier P.C. Board Ass'y . . . . . 2-10
- 4. Packing Materials and Part Numbers . . . . . 2-13
- 5. Label . . . . . 2-14
- 6. Accessories List . . . . . 2-14

# 1. Main Parts Locations


## 1-(1) Top View

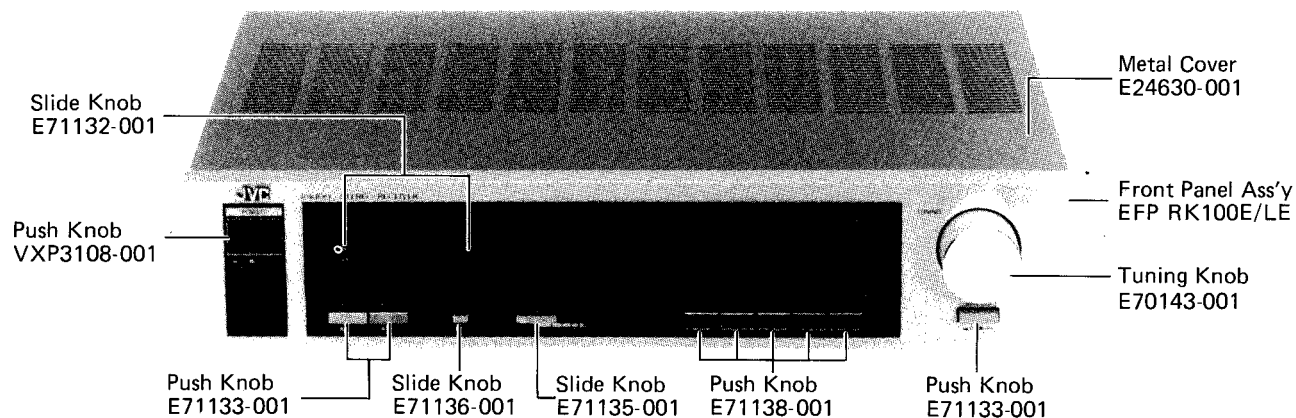

## 1-(2) Front View

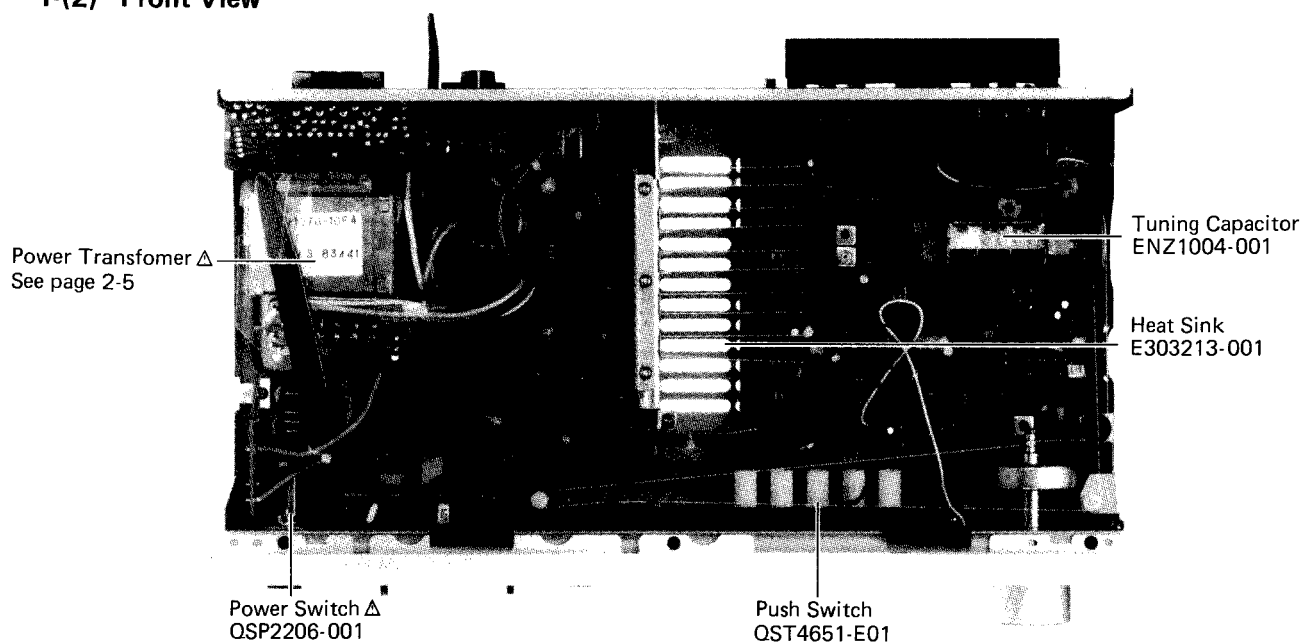

## 1-(3) Rear View

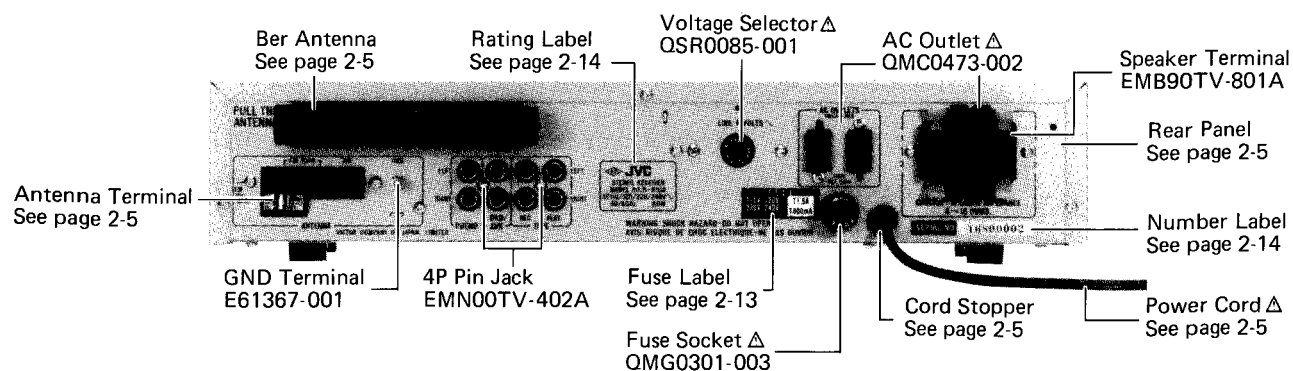

## 2. Exploded View and Part Numbers

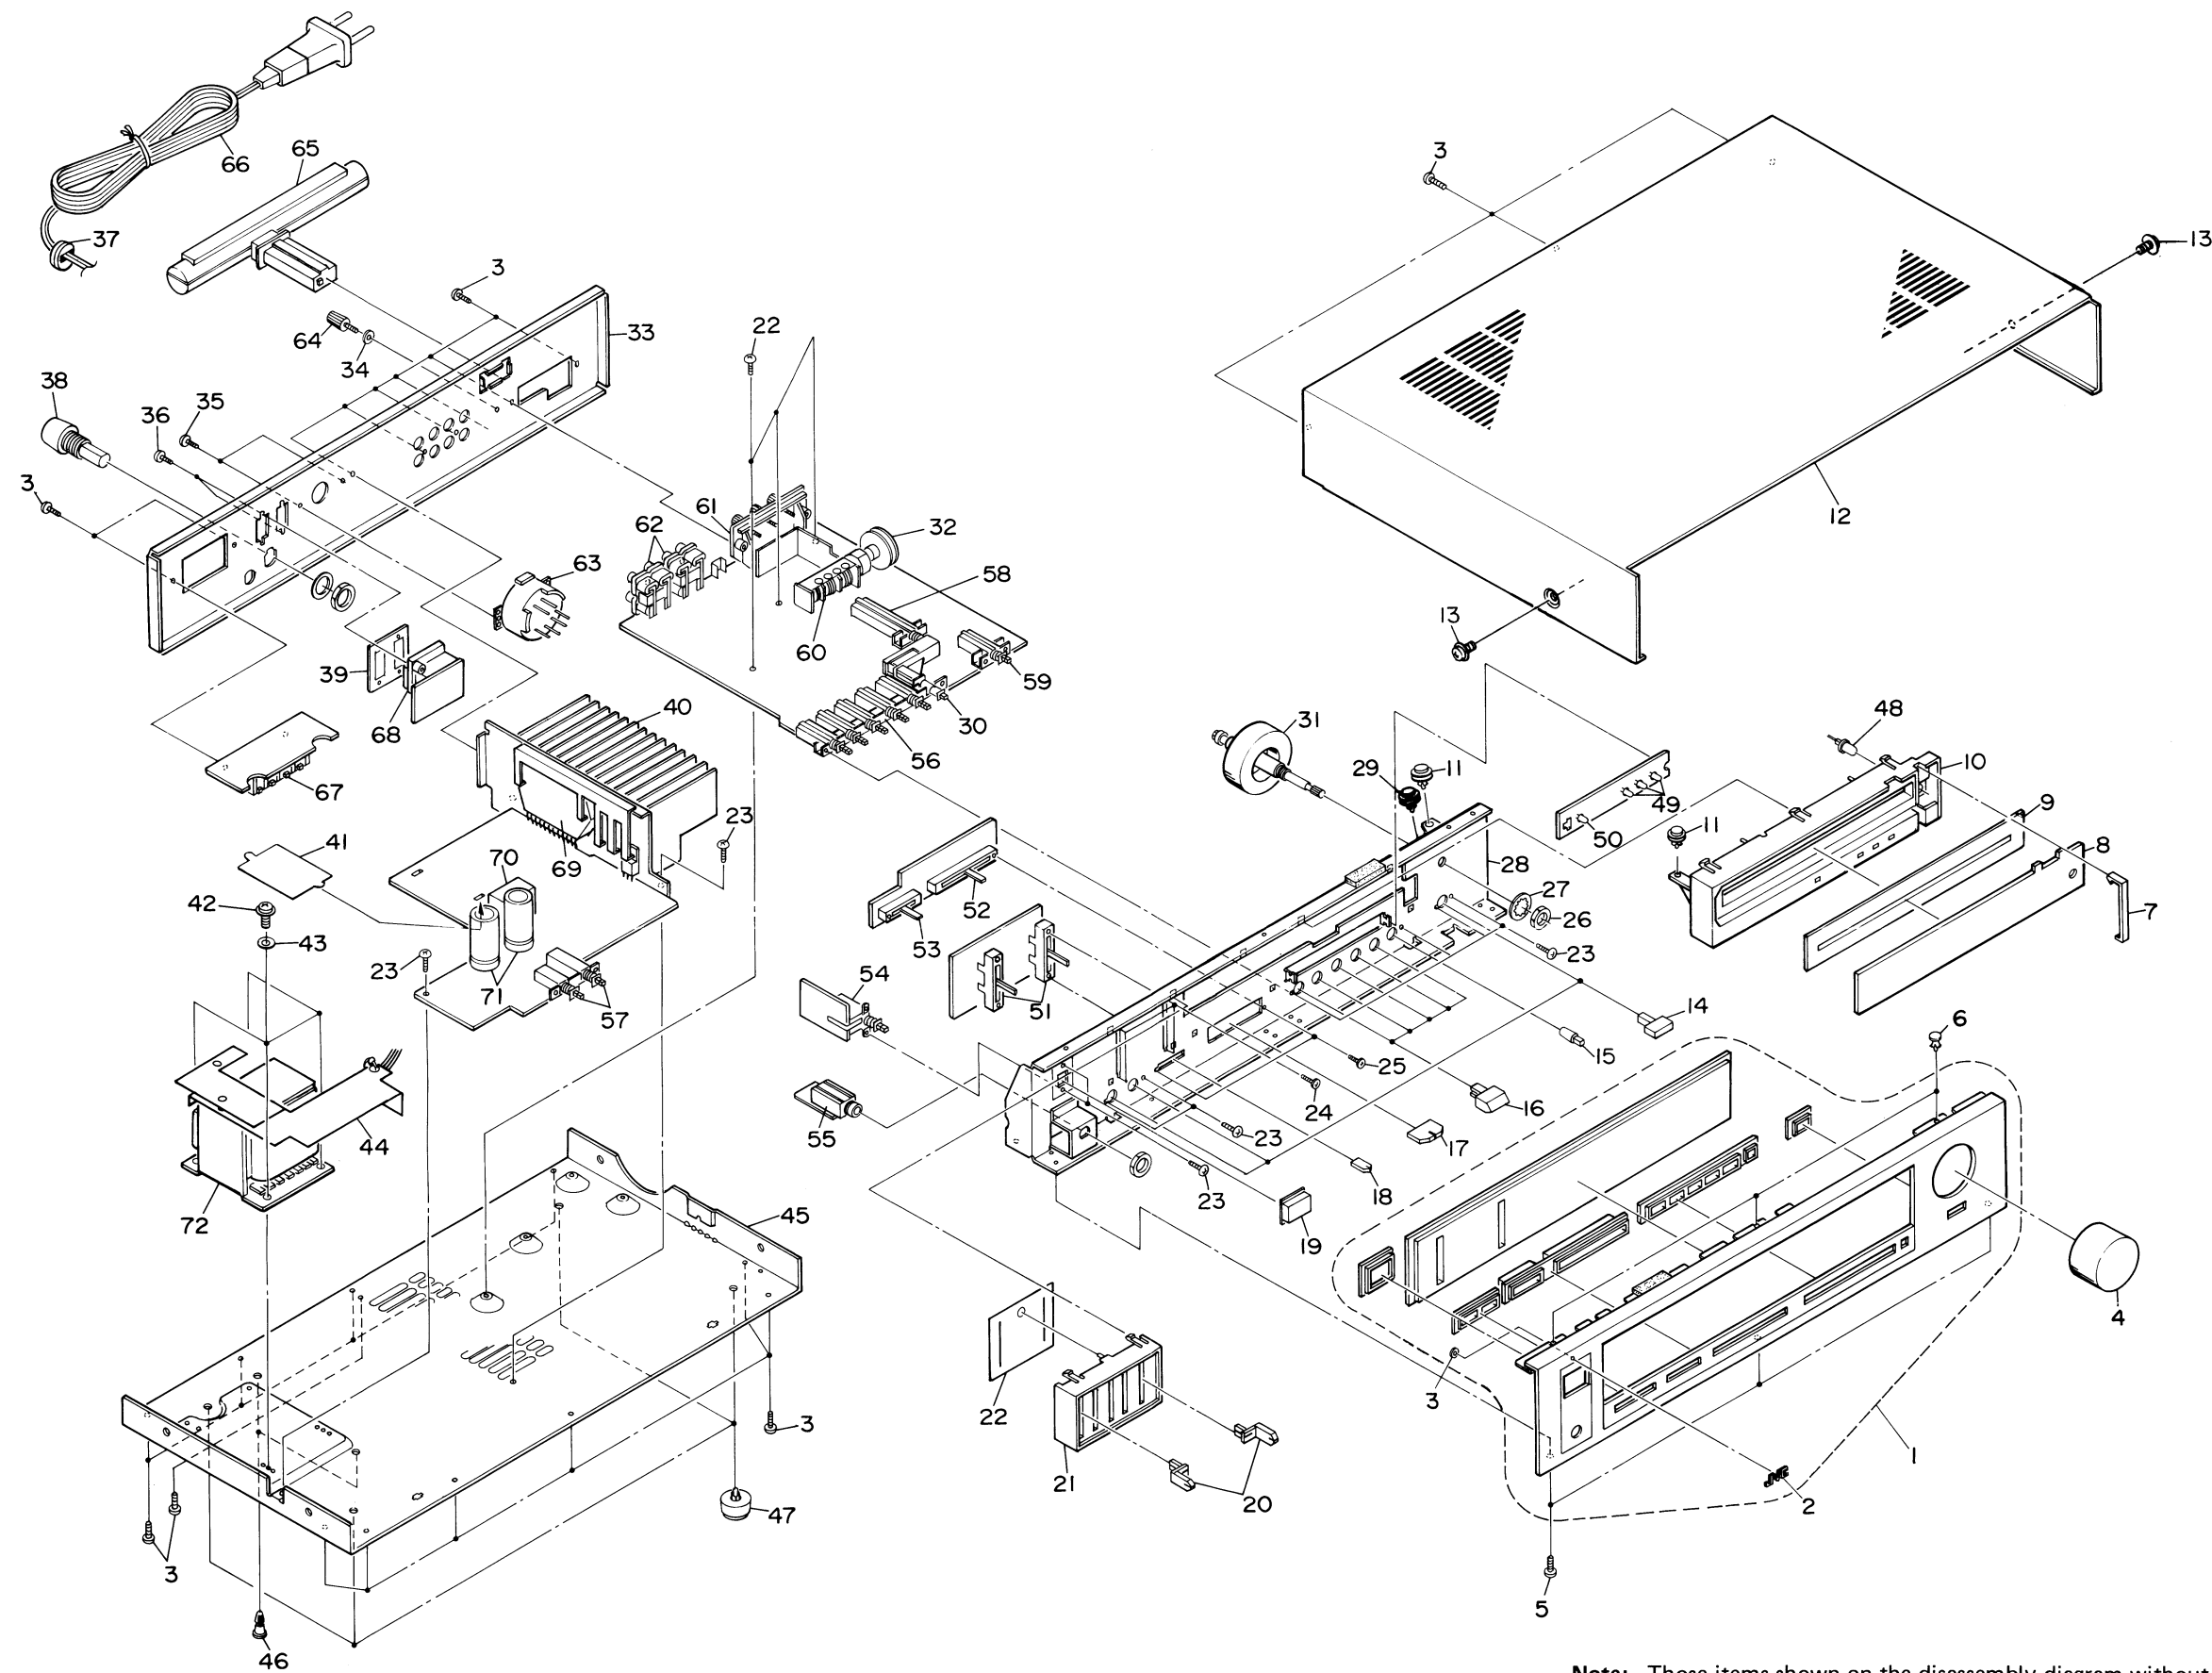


Fig. 1  
(No. 2729) 2-3

**Note:** Those items shown on the disassembly diagram without indication of reference Nos. are supplied as assembly parts.

### 3. Printed Circuit Board Ass'y and Parts List

#### 3-(1) ENA-021 Tuner P.C. Board Ass'y

Note: ENA-021 varies according to the area employed. See note (1) when placing an order.

##### Note (1)

Designated Areas	P.C. Board Ass'y
U.S.A., Canada, U.S. Military Market and Other Countries	ENA-021 <span style="border: 1px solid black; padding: 0 2px;">A</span>
Europe and Australia	ENA-021 <span style="border: 1px solid black; padding: 0 2px;">B</span>
Europe (LW) and U.K.	ENA-021 <span style="border: 1px solid black; padding: 0 2px;">C</span>
West Germany	ENA-021 <span style="border: 1px solid black; padding: 0 2px;">D</span>

##### Note (2)

The symbols (赤、黒、白... etc.) on P.C. Board surface are factory process only.

No.	Part Number	Part Name	Q'ty	Description	Area
1	EFP-RK100E	Front Panel Ass'y	1		J,C,U,P,PG,E,A,G
2	EFP-RK100LE	Front Panel Ass'y	1		LE,LBS
3	E70913-002	JVC Mark	1		
4	E60912-003	Speed Nut	1		
5	E70143-001	Tuning Knob	1	TUNING	
6	SBSB3008N	Tapping Screw	25		
7	E48729-009	Plastic Rivet	3		
8	E71212-001	Stopper	1		
9	E303214-001	Dial Scale	1		J,C,U,P,PG,E,A,G
10	E303214-002	Dial Scale	1		LE,LBS
11	E71142-001	Sheet	1		
12	E24630-001	Dial Back	1		
13	E66082-003	Roller Ass'y	2		
14	E24633-001	Metal Cover	1		
15	E61660-001	Special Screw	2		
16	E71133-001	Push Knob	3	Spk. MUTE OFF	LE,LBS
17	E69907-005	Push knob	1	LW	
18	E71138-001	Push Knob	5	Function	
19	E71136-001	Slide Knob	1	BALANCE	
20	E71135-001	Slide Knob	1	VOLUME	
21	VXP3108-001	Push Knob	1	POWER	
22	E71132-001	Slide Knob	2	STONE	
23	E303210-001	Knob Guide	1		
24	E71141-001	Felt Spacer	1		
25	E65119-001	Special Screw	13		
26	SPST2604N	Tapping Screw	4		
27	E70053-001	Special Screw	2		
28	E43323-002	Nut	1		
29	WAS50000Z	Washer	1		
30	E10948-001	Front Bracket	1		
31	E66082-001	Roller Ass'y	1	LW	LE,LBS
32	E68113-001	Push Shaft	1		
33	E301257-002	Tuning Shaft Ass'y	1		
34	QZD1205-003	Dial Drum	1		J,C
35	E24631-001	Rear Panel	2		
36	E24631-002	Rear Panel	3		U,P,PG
37	E24631-003	Rear Panel	4		E,A,LE,LBS
38	E24631-004	Rear Panel	1		G
39	WNS3000N	Washer	1		
40	SBSB3008N	Tapping Screw	2	LINE VOLTS	U,P,PG
41	SDBS3008N	Tapping Screw	2	AC Outlet	J,C,U,P,PG
42	QHS3876-162	Cord Stopper	1		J,C,U,P,PG,E,A,G,LE
43	QHS3876-162BS	Cord Stopper	1		LBS
44	QMG0301-003	Fuse Socket	1	Rear Panel	U,P,PG
45	E69589-002	Spacer	1	AC Outlet	J
46	E303213-001	Heat Sink	1		
47	E71236-001	Fuse Plate	1		
48	E60134-001	Special Screw	1		
49	WLS4000Z	Washer	1		
50	E303398-001	Cover	1	Power Trans	
51	E10949-001	Chassis Base Ass'y	1		
52	E303216-001	Fastener	2		
53	E301258-002	Foot	4		
54	ELP3104-B100F	Pilot Lamp	1		
55	SLB-26MW50F	L.E.D.	3		
56	QVZ5206-005	Volume	2	TONE	
57	QVZ5202-001	Volume	1	VOLUME	
58	QVZ5307-001	Volume	1	BALANCE	
59	QSP2206-001	Push Switch	1	POWER	
60	QMS6302-128	Head Phone Jack	1		
61	QST4651-E01	Push Switch	1	Function	LE,LBS
62	QST8261-E02	Push Switch	1	SPEAKERS	
63	QST4101-E01	Push Switch	1	LW	
64	QSP0219-058	Push Switch	1	MUTE OFF	
65	ENZ1004-001	Tuning Capacitor	1		J,C,U,P,PG,E,A,G
66	E03572-016	Antenna Terminal	1		G
67	EMB91YV-201A	Antenna Terminal	1		
68	EMN00TV-402A	4P Pin Jack	2		
69	QSR0085-001	Voltage Selector	1	LINE VOLTS	U,P,PG
70	E61367-001	GND Terminal	1		
71	EQB3101-102S	Bar Antenna Coil	1		J,C,U,P,PG,E,A,G
72	EQB3204-102S	Bar Antenna Coil	1		LE,LBS
73	QMP1200-200	Power Cord	1		J
74	QMP1900-200	Power Cord	1		C
75	QMP2560-244	Power Cord	1		A
76	QMP3900-200	Power Cord	1		E,G,LE
77	QMP7600-200	Power Cord	1		U,P,PG
78	QMP9017-008BS	Power Cord	1		LBS
79	EMB90TV-801A	Speaker terminal	1		
80	QMC0437-002	AC Outlet	1		J,C,U,P,PG
81	STK4141MK2	Power I.C.	1		
82	ESK6D24-213	Relay	1		
83	QE20072-338	Electrostatic Capacitor	2		
84	ETP1070-10JA	Power Transformer	1		J
85	ETP1070-10CA	Power Transformer	1		C
86	ETP1070-10FA	Power Transformer	1		U,P,PG
87	ETP1070-10EA	Power Transformer	1		E,A,G,LE
88	ETP1070-10EABS	Power Transformer	1		LBS

#### The Marks for Designated Areas.

J..... U.S.A  
C..... Canada  
P,PG..... U.S.Military  
E,LE..... Europe  
G..... West Germany  
A..... Australia  
LBS..... U.K.  
U..... Other Countries

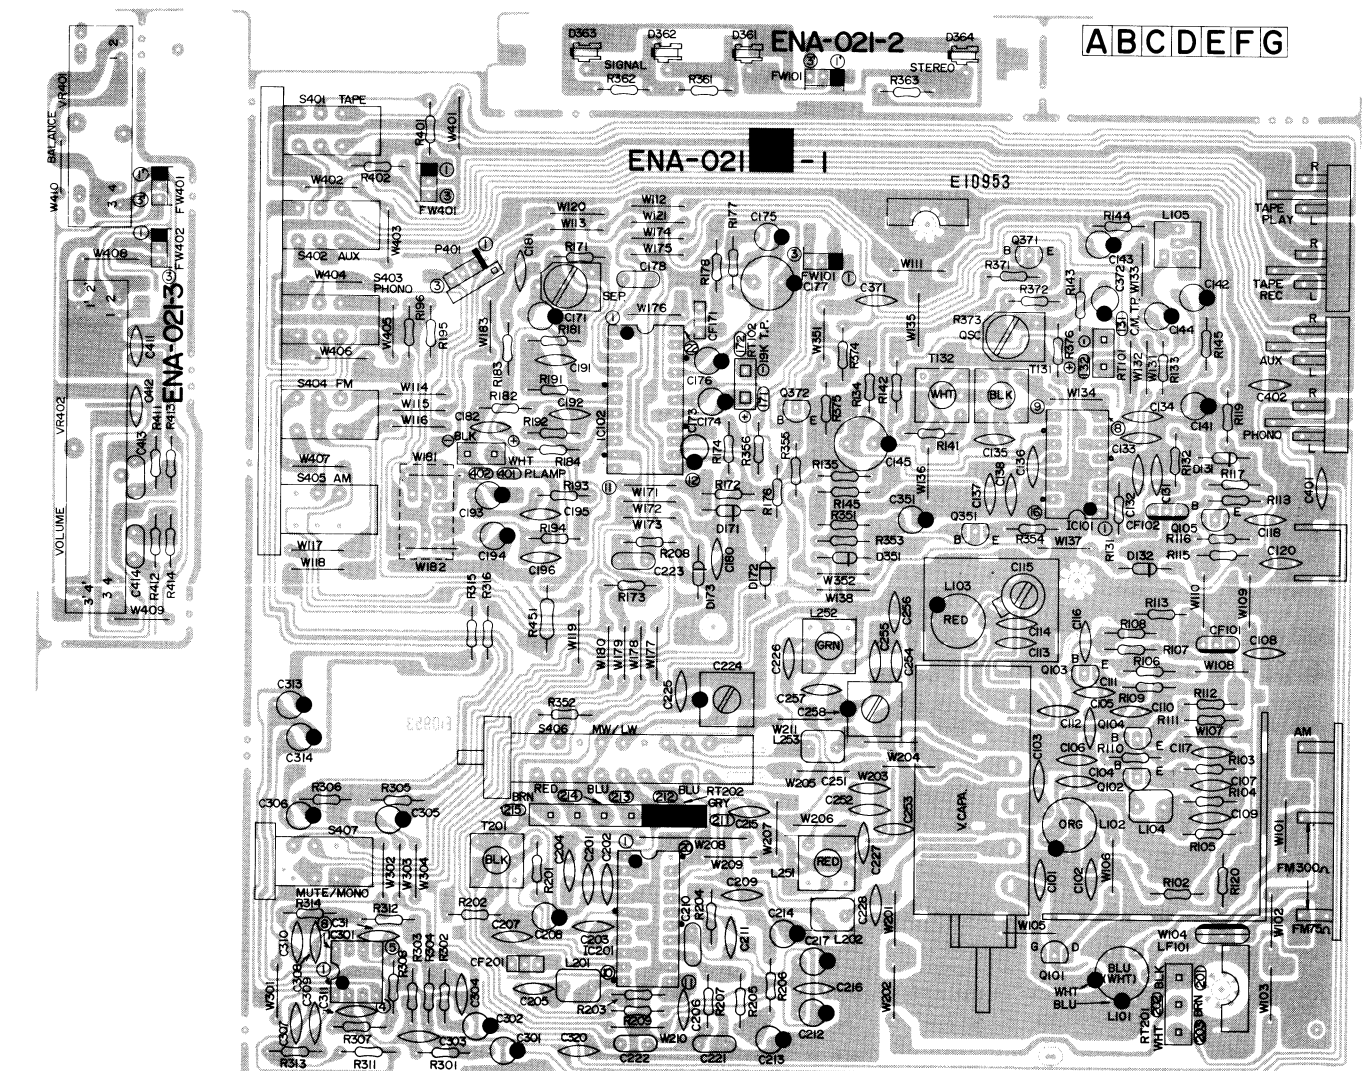


Fig. 2

## Each Individual P.C.Board Location

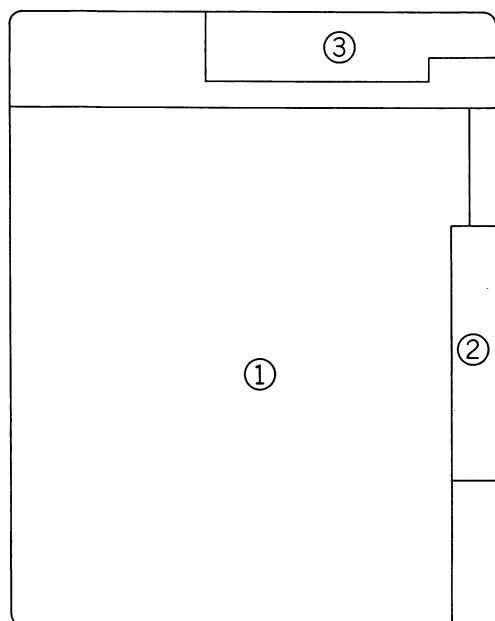


Fig. 3

- ① Tuner P.C.Board Ass'y  
 ② LED P.C.Board Ass'y  
 ③ Volume P.C.Board Ass'y

## The Marks for Designated Areas

- A . . . . . U.S.A., Canada, U.S. Military  
 B . . . . . Europe, Australia  
 C . . . . . Europe (LW), U.K.  
 D . . . . . West Germany

## Transistors

ITEM	PART NUMBER	DESCRIPTION	
			M A K E R
Q101	2SK168(E,F)	F.E.T.	HITACHI
Q102	2SC535(B,C)	SILICON	HITACHI
Q103	2SC461(C)	SILICON	HITACHI
Q104	2SC461(C)	SILICON	HITACHI
Q105	2SC535(B,C)	SILICON	HITACHI
Q351	2SC458(D)	SILICON	HITACHI

## IC

ITEM	PART NUMBER	DESCRIPTION	
			M A K E R
IC101	HA1137W		HITACHI
IC102	LA3400		SANYO
IC201	LA1245		SANYO
IC301	NJM4558D-D		DAINICHI

## Diodes

ITEM	PART NUMBER	DESCRIPTION	
			M A K E R
D131	1S2076-31	SILICON	HITACHI
D132	1S2076-31	SILICON	HITACHI
D171	1S2076-31	SILICON	HITACHI
D172	1S2076-31	SILICON	HITACHI
D173	1S2076-31	SILICON	HITACHI
D351	1S2076-31	SILICON	HITACHI
D361	SLB-26MW50F	L.E.D.	
D362	SLB-26MW50F	L.E.D.	
D363	SLB-26MW50F	L.E.D.	
D364	SLB-26VW50F	L.E.D.	

## Coil

ITEM	PART NUMBER	DESCRIPTION	
L101	EQR2306-015	RF COIL	
L101	EQR2306-015	RF COIL	
L101	EQR2306-015	RF COIL	
L101	EQR2306-017	RF COIL	
L102	EQR2306-003	RF COIL	
L103	EQR2406-001	RF COIL	
L104	EQL3001-1R5K	INDUCTOR	
L105	EQF0102-001	FILTER	
L201	EQL3001-102K	INDUCTOR	
L202	EQL3001-2R2K	INDUCTOR	
L251	EQR1210-006	RF COIL	
L252	EQR1310-004	RF COIL	
L253	EQL3001-2R2K	INDUCTOR	
T131	EQT2140-008	I.F. TRANSFORMER	
T132	EQT2140-009	I.F. TRANSFORMER	
T201	EQT1021-004	I.F. TRANSFORMER	

## Capacitors

ITEM	PART NUMBER	DESCRIPTION		
C101	QCS21HJ-100H	10PF	50V	CERAMIC
C102	QCF21HP-103H	0.01MF	50V	CERAMIC
C103	QCS21HJ-150H	15PF	50V	CERAMIC
C104	QCS21HJ-3R0H	3PF	50V	CERAMIC
C104	QCS21HJ-4R0H	4PF	50V	CERAMIC
C104	QCS21HJ-4R0H	4PF	50V	CERAMIC
C104	QCS21HJ-4R0H	4PF	50V	CERAMIC
C105	QCS21HJ-2R0H	2PF	50V	CERAMIC
C106	QCS21HJ-5R0H	5PF	50V	CERAMIC
C107	QCF21HP-103H	0.01MF	50V	CERAMIC
C108	QCF21HP-103H	0.01MF	50V	CERAMIC
C109	QCS21HJ-151H	150PF	50V	CERAMIC
C110	QCT26CH-100H	10PF	50V	CERAMIC
C111	QCT26CH-220H	22PF	50V	CERAMIC
C112	QCT26CH-7R0H	7PF	50V	CERAMIC



Capacitors

ITEM	PART NUMBER	DESCRIPTION		
C113	QCT26RH-180H	18PF	50V	CERAMIC
C115	ENZ1003-004			TRIMMER
C116	QCF21HP-103H	0.01MF	50V	CERAMIC
C117	QCF21HP-103H	0.01MF	50V	CERAMIC
C118	QCF21HP-223H	0.022MF	50V	CERAMIC
C131	QCF21HP-223H	0.022MF	50V	CERAMIC
C132	QCF21HP-223H	0.022MF	50V	CERAMIC
C133	QCS21HJ-151H	150PF	50V	CERAMIC
C133	QCS21HJ-151H	150PF	50V	CERAMIC
C133	QCS21HJ-151H	150PF	50V	CERAMIC
C133	QCS21HJ-331H	330PF	50V	CERAMIC
C134	QCF21HP-223H	0.022MF	50V	CERAMIC
C135	QCF21HP-223H	0.022MF	50V	CERAMIC
C136	QCC21EM-473H	0.047MF	25V	CERAMIC
C137	QCF21HP-223H	0.022MF	50V	CERAMIC
C138	QCF21HP-223H	0.022MF	50V	CERAMIC
C141	QET51EM-106	10MF	25V	ELECTORO
C142	QET51HM-105	1MF	50V	ELECTORO
C143	QET51HM-475	4.7MF	50V	ELECTORO
C144	QET51HM-475	4.7MF	50V	ELECTORO
C145	QET51CM-107	100MF	16V	ELECTORO
C171	QET51EM-106	10MF	25V	ELECTORO
C173	QET51HM-105	1MF	50V	ELECTORO
C174	QET51HM-105	1MF	50V	ELECTORO
C175	QEB51HM-105	1MF	50V	L.L.C.E.
C176	QEB51HM-474	0.47MF	50V	ELECTORO
C177	QET51CM-107	100MF	16V	ELECTORO
C178	QFM31HK-473	0.047MF	50V	MYLAR
C180	QCC21EM-223H	0.022MF	25V	CERAMIC
C191	QCS21HJ-331H	330PF	50V	CERAMIC
C191	QCS21HJ-331H	330PF	50V	CERAMIC
C191	QCS21HJ-331H	330PF	50V	CERAMIC
C191	QCS21HJ-471H	470PF	50V	CERAMIC
C192	QCS21HJ-331H	330PF	50V	CERAMIC
C192	QCS21HJ-331H	330PF	50V	CERAMIC
C192	QCS21HJ-331H	330PF	50V	CERAMIC
C192	QCS21HJ-331H	330PF	50V	CERAMIC
C192	QCS21HJ-471H	470PF	50V	CERAMIC
C193	QET51HM-105	1MF	50V	ELECTORO
C194	QET51HM-105	1MF	50V	ELECTORO
C195	QCY21HK-472H	4700PF	50V	CERAMIC
C196	QCY21HK-472H	4700PF	50V	CERAMIC
C201	QCY21HK-102H	1000PF	50V	CERAMIC
C202	QCF21HP-223H	0.022MF	50V	CERAMIC
C203	QCF21HP-223H	0.022MF	50V	CERAMIC
C204	QCF21HP-223H	0.022MF	50V	CERAMIC
C205	QCS21HJ-121H	120PF	50V	CERAMIC
C206	QCY21HK-102H	1000PF	50V	CERAMIC
C207	QCF21HP-223H	0.022MF	50V	CERAMIC
C208	QET51CM-226	22MF	16V	ELECTORO
C209	QCF21HP-223H	0.022MF	50V	CERAMIC
C210	QFM31HK-223	0.22MF	50V	MYLAR
C211	QCF21HP-223H	0.022MF	50V	CERAMIC
C212	QET51HM-105	1MF	50V	ELECTORO
C213	QET51HM-475	4.7MF	50V	ELECTORO
C214	QET51HM-225	2.2MF	50V	ELECTORO
C215	QCF21HP-223H	0.022MF	50V	CERAMIC
C216	QCF21HP-223H	0.022MF	50V	CERAMIC
C217	QET51CM-226	22MF	16V	ELECTORO
C221	QFM31HK-822	0.082MF	50V	MYLAR
C222	QFM31HK-473	0.047MF	50V	MYLAR
C223	QFM31HK-473	0.047MF	50V	MYLAR
C224	QAT2001-005	15PF	50V	TRIMMER
C225	QCS21HJ-150H	15PF	50V	CERAMIC
C251	QCT26CH-181H	180PF	50V	CERAMIC
C252	QCT26CH-181H	180PF	50V	CERAMIC
C253	QCT26UJ-220H	22PF	50V	CERAMIC
C254	QCT26CH-101H	100PF	50V	CERAMIC
C255	QCT26CH-470H	47PF	50V	CERAMIC
C256	QCT26RH-270H	27PF	50V	CERAMIC
C257	QCT26CH-330H	33PF	50V	CERAMIC
C258	QAT2001-005	15PF	50V	TRIMMER
C301	QET51HM-475	4.7MF	50V	ELECTORO
C302	QET51HM-475	4.7MF	50V	ELECTORO
C303	QCS21HJ-331H	330PF	50V	CERAMIC
C304	QCS21HJ-331H	330PF	50V	CERAMIC
C305	QET51HM-225	2.2MF	50V	ELECTORO
C306	QET51HM-225	2.2MF	50V	ELECTORO
C307	QCY21HK-182H	1800PF	50V	CERAMIC

Capacitors

ITEM	PART NUMBER	DESCRIPTION		
C308	QCY21HK-182H	1800PF	50V	CERAMIC
C309	QCY21HK-682H	6800PF	50V	CERAMIC
C310	QCY21HK-682H	6800PF	50V	CERAMIC
C311	QCS21HJ-331H	330PF	50V	CERAMIC
C311	QCS21HJ-560H	56PF	50V	CERAMIC
C311	QCS21HJ-560H	56PF	50V	CERAMIC
C311	QCS21HJ-560H	56PF	50V	CERAMIC
C312	QCS21HJ-331H	330PF	50V	CERAMIC
C312	QCS21HJ-560H	56PF	50V	CERAMIC
C312	QCS21HJ-560H	56PF	50V	CERAMIC
C312	QCS21HJ-560H	56PF	50V	CERAMIC
C313	QET51EM-106	10MF	25V	ELECTORO
C314	QET51EM-106	10MF	25V	ELECTORO
C351	QET51HM-475	4.7MF	50V	ELECTORO
C401	QCF21HP-223H	0.022MF	50V	CERAMIC
C402	QCF21HP-223H	0.022MF	50V	CERAMIC
C411	QCS21HJ-181H	180PF	50V	CERAMIC
C412	QCS21HJ-181H	180PF	50V	CERAMIC
C413	QFM31HK-183	0.018MF	50V	MYLAR
C414	QFM31HK-183	0.018MF	50V	MYLAR

Resistors

ITEM	PART NUMBER	DESCRIPTION		
R101	QRD148J-330SN	33	1/4W	CARBON
R102	QRD148J-221SN	220	1/4W	CARBON
R103	QRD148J-102SN	1K	1/4W	CARBON
R104	QRD148J-302SN	3K	1/4W	CARBON
R104	QRD148J-472SN	4.7K	1/4W	CARBON
R104	QRD148J-472SN	4.7K	1/4W	CARBON
R104	QRD148J-472SN	4.7K	1/4W	CARBON
R105	QRD148J-223SN	22K	1/4W	CARBON
R105	QRD148J-223SN	22K	1/4W	CARBON
R105	QRD148J-223SN	22K	1/4W	CARBON
R105	QRD148J-223SN	22K	1/4W	CARBON
R105	QRD148J-223SN	22K	1/4W	CARBON
R106	QRD148J-222SN	2.2K	1/4W	CARBON
R107	QRD148J-103SN	10K	1/4W	CARBON
R108	QRD148J-682SN	6.8K	1/4W	CARBON
R109	QRD148J-222SN	2.2K	1/4W	CARBON
R110	QRD148J-102SN	1K	1/4W	CARBON
R111	QRD148J-392SN	3.9K	1/4W	CARBON
R112	QRD148J-221SN	220	1/4W	CARBON
R113	QRD148J-102SN	1K	1/4W	CARBON
R115	QRD148J-222SN	2.2K	1/4W	CARBON
R116	QRD148J-102SN	1K	1/4W	CARBON
R117	QRD148J-391SN	390	1/4W	CARBON
R118	QRD148J-101SN	100	1/4W	CARBON
R119	QRZ0062-330	33	1/4W	FUSIBLE
R119	QRZ0062-330	33	1/4W	FUSIBLE
R119	QRZ0062-330	33	1/4W	FUSIBLE
R120	QRD148J-472SN	4.7K	1/4W	CARBON
R131	QRD148J-331SN	330	1/4W	CARBON
R132	QRD148J-103SN	10K	1/4W	CARBON
R133	QRD148J-562SN	5.6K	1/4W	CARBON
R134	QRD145J-330S	33	1/4W	CARBON
R134	QRZ0062-330	33	1/4W	FUSIBLE
R134	QRZ0062-330	33	1/4W	FUSIBLE
R134	QRZ0062-330	33	1/4W	FUSIBLE
R135	QRD148J-472SN	4.7K	1/4W	CARBON
R141	QRD148J-222SN	2.2K	1/4W	CARBON
R141	QRD148J-222SN	2.2K	1/4W	CARBON
R141	QRD148J-202SN	2K	1/4W	CARBON
R141	QRD148J-222SN	2.2K	1/4W	CARBON
R142	QRD148J-113SN	11K	1/4W	CARBON
R142	QRD148J-123SN	12K	1/4W	CARBON
R142	QRD148J-123SN	12K	1/4W	CARBON
R143	QRD148J-561SN	560	1/4W	CARBON
R145	QRD148J-102SN	1K	1/4W	CARBON
R171	EVP314-7-B15			VARIABLE
R171	EVP314-7-B15			VARIABLE
R171	EVP314-7-B15			VARIABLE
R171	QRD148J-223SN	22K	1/4W	CARBON
R172	QRD148J-103SN	10K	1/4W	CARBON
R173	QRD148J-472SN	4.7K	1/4W	CARBON

⚠ Safety Parts

## Resistors

ITEM	PART NUMBER	DESCRIPTION			
R174	QRD148J-103SN	10K	1/4W	CARBON	A B C D
R176	QRD148J-222SN	2.2K	1/4W	CARBON	
R177	QRD148J-332SN	3.3K	1/4W	CARBON	
R178	QRD145J-330S	33	1/4W	CARBON	
R178	QRZ0062-330	33	1/4W	FUSIBLE $\Delta$	A B C D
R178	QRZ0062-330	33	1/4W	FUSIBLE $\Delta$	
R178	QRZ0062-330	33	1/4W	FUSIBLE $\Delta$	
R181	QRD148J-184SN	180K	1/4W	CARBON	
R182	QRD148J-184SN	180K	1/4W	CARBON	
R191	QRD148J-134SN	130K	1/4W	CARBON	
R192	QRD148J-134SN	130K	1/4W	CARBON	
R193	QRD148J-332SN	3.3K	1/4W	CARBON	
R194	QRD148J-332SN	3.3K	1/4W	CARBON	
R195	QRD148J-562SN	5.6K	1/4W	CARBON	
R196	QRD148J-562SN	5.6K	1/4W	CARBON	
R201	QRD148J-152SN	1.5K	1/4W	CARBON	
R202	QRD148J-271SN	270	1/4W	CARBON	
R203	QRD148J-471SN	470	1/4W	CARBON	
R204	QRD148J-221SN	220	1/4W	CARBON	
R205	QRD148J-103SN	10K	1/4W	CARBON	
R206	QRD148J-103SN	10K	1/4W	CARBON	
R207	QRD148J-103SN	10K	1/4W	CARBON	
R208	QRD148J-822SN	8.2K	1/4W	CARBON	
R209	QRZ0062-680	68	1/4W	FUSIBLE $\Delta$	
R209	QRZ0062-680	68	1/4W	FUSIBLE $\Delta$	
R209	QRZ0062-680	68	1/4W	FUSIBLE $\Delta$	
R301	QRD148J-222SN	2.2K	1/4W	CARBON	
R302	QRD148J-222SN	2.2K	1/4W	CARBON	
R303	QRD148J-563SN	56K	1/4W	CARBON	
R304	QRD148J-563SN	56K	1/4W	CARBON	
R305	QRD148J-104SN	100K	1/4W	CARBON	
R306	QRD148J-104SN	100K	1/4W	CARBON	
R307	QRD148J-821SN	820	1/4W	CARBON	
R308	QRD148J-821SN	820	1/4W	CARBON	
R311	QRD148J-393SN	39K	1/4W	CARBON	
R312	QRD148J-393SN	39K	1/4W	CARBON	
R313	QRD148J-474SN	470K	1/4W	CARBON	
R314	QRD148J-474SN	470K	1/4W	CARBON	
R315	QRD148J-181SN	180	1/4W	CARBON	
R316	QRD148J-181SN	180	1/4W	CARBON	
R351	QRD148J-183SN	18K	1/4W	CARBON	
R352	QRD148J-472SN	4.7K	1/4W	CARBON	
R353	QRD148J-333SN	33K	1/4W	CARBON	
R354	QRD148J-101SN	100	1/4W	CARBON	
R355	QRD148J-151SN	150	1/4W	CARBON	
R356	QRD148J-681SN	680	1/4W	CARBON	
R361	QRD148J-331SN	330	1/4W	CARBON	
R362	QRD148J-181SN	180	1/4W	CARBON	
R363	QRD148J-222SN	2.2K	1/4W	CARBON	
R401	QRD148J-332SN	3.3K	1/4W	CARBON	
R402	QRD148J-332SN	3.3K	1/4W	CARBON	
R411	QRD148J-683SN	68K	1/4W	CARBON	
R412	QRD148J-683SN	68K	1/4W	CARBON	
R413	QRD148J-223SN	22K	1/4W	CARBON	
R414	QRD148J-223SN	22K	1/4W	CARBON	
R451	QRZ0062-220	22	1/4W	FUSIBLE $\Delta$	D A B C
R451	QRD125J-330	33	1/2W	CARBON $\Delta$	
R451	QRZ0062-220	22	1/4W	FUSIBLE $\Delta$	
R451	QRZ0062-220	22	1/4W	FUSIBLE $\Delta$	
VR401	QVZ5307-001			VARIABLE	
VR402	QVZ5020-001			VARIABLE	

 $\Delta$  Safety Parts

## Others

ITEM	PART NUMBER	DESCRIPTION		
	EMN00TV-402A	PIN JACK ASS'Y		D A B C
	EMB1YV-201A	TERMINAL BOARD		
	E03572-016	TERMINAL BOARD		
	E03572-016	TERMINAL BOARD		
	E03572-016	TERMINAL BOARD		A B D
	E67764-002	TERMINAL ASS'Y		
	E67764-002	TERMINAL ASS'Y		
	E67764-002	TERMINAL ASS'Y		
	E67764-002	TERMINAL ASS'Y		
	E67764-003	TERMINAL ASS'Y		
	E67764-006	WRAPPING TERMINAL		C
	E10953-002	CIRCUIT BOARD		
	QHW1052-001	WIRE CLAMP		
	E65396-003	EARTH PLATE		
	E70225-001	EARTH PLATE		
	E71007-001	SHIELD CASE		D
	E71008-001	SHIELD CASE		
P401	E04365-003	3P SOCKET		
S401	QST4651-E01	PUSH SWITCH		
S406	QST4101-E10	PUSH SWITCH		C
S407	QSP0219-058	PUSH SWITCH		
CF101	ECB2118-001	CERAMIC FILTER		
CF101	ECB2118-001	CERAMIC FILTER		
CF101	ECB2118-001	CERAMIC FILTER		B C D A
CF101	ECB2118-001	CERAMIC FILTER		
CF101	ECB2123-001	CERAMIC FILTER		
CF102	ECB2118-001	CERAMIC FILTER		
CF102	ECB2118-001	CERAMIC FILTER		B C D A
CF102	ECB2118-001	CERAMIC FILTER		
CF102	ECB2118-001	CERAMIC FILTER		
CF102	ECB2123-001	CERAMIC FILTER		
CF171	ECX0000-456KS	RESONATOR		D
CF201	ECB1510-001	CERAMIC FILTER		
LF101	EQF0101-005	FILTER		
	ENZ1004-001	VARICAP		

**3-(2) ENH-026 ☐ Amplifier P.C. Board Ass'y**


**Note:** ENH-026□ varies according to the areas employed. See note (1) when placing an order.

### Note (1)

Designated Areas	P.C. Board Ass'y
U.S.A.	ENH-026 <span style="border: 1px solid black; padding: 0 2px;">A</span>
Canada	ENH-026 <span style="border: 1px solid black; padding: 0 2px;">B</span>
Europe	ENH-026 <span style="border: 1px solid black; padding: 0 2px;">D</span>
Australia	ENH-026 <span style="border: 1px solid black; padding: 0 2px;">G</span>
West Germany	ENH-026 <span style="border: 1px solid black; padding: 0 2px;">F</span>
U.K.	ENH-026 <span style="border: 1px solid black; padding: 0 2px;">EBS</span>
U.S. Military Market and Other Countries	ENH-026 <span style="border: 1px solid black; padding: 0 2px;">C</span>

**Note (2)**

The symbols ( 赤、黒、白 ... etc.) on P.C. Board surface are factory process only.

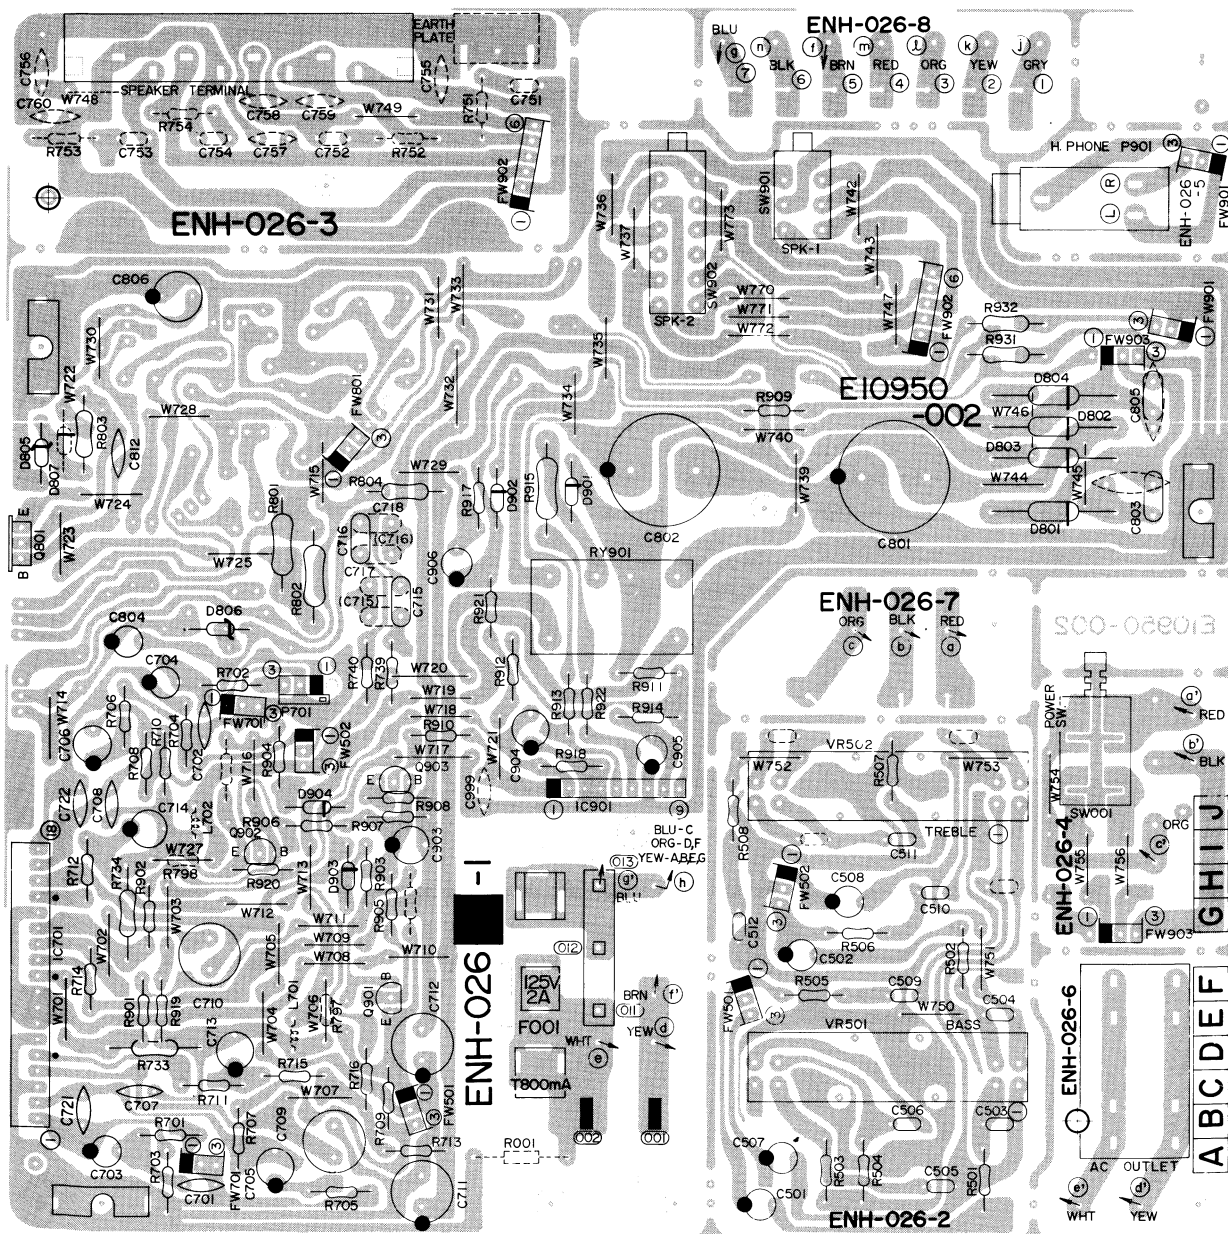

**Fig. 4**

## Each Individual P.C.Board Location

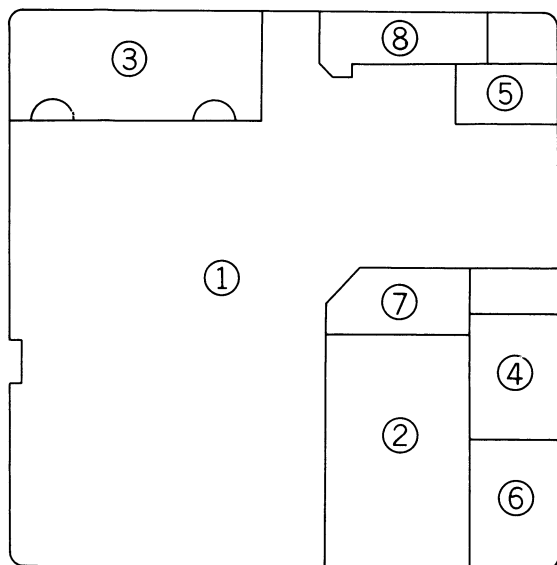


Fig. 5

- ① Main Anp. P.C.Board Ass'y  
 ② Tone Control P.C.Board Ass'y  
 ③ Speaker Terminal P.C.Board Ass'y  
 ④ Power Switch P.C.Board Ass'y  
 ⑤ Headphone P.C.Board Ass'y  
 ⑥ AC Outlet P.C.Board Ass'y  
 ⑦ Secondary P.C.Board Ass'y  
 ⑧ Primary P.C.Board Ass'y

## The Marks for Designated Areas

A . . . . . U.S.A.  
 B . . . . . Canada  
 D . . . . . Europe  
 G . . . . . Australia  
 F . . . . . West Germany  
 EBS . . . U.K.  
 C . . . . . U.S'.Military, Other Countries

## Transistors

ITEM	PART NUMBER	DESCRIPTION	
		M A K E R	
Q801	2SD1265A(O,P)	SILICON	MATSUSHITA
Q901	2SC1775(E,F)	SILICON	NEC
Q902	2SC1775(E,F)	SILICON	NEC
Q903	2SA733A(P,Q)	SILICON	NEC

## Diodes

ITEM	PART NUMBER	DESCRIPTION	
D901	1S2076-31	SILICON	HITACHI
D902	1S2076-31	SILICON	HITACHI
D903	1S2076-31	SILICON	HITACHI
D904	1S2076-31	SILICON	HITACHI

## Coil

ITEM	PART NUMBER	DESCRIPTION
L701	EQL0001-R45	INDUCTOR
L702	EQL0001-R45	INDUCTOR

F  
F

## Capacitors

ITEM	PART NUMBER	DESCRIPTION		
C501	QET51EM-106	10MF	25V	ELECTORO
C502	QET51EM-106	10MF	25V	ELECTORO
C503	QFM31HK-153	0.015MF	50V	MYLER
C504	QFM31HK-153	0.015MF	50V	MYLER
C505	QFM31HK-823	0.082MF	50V	MYLAR
C506	QFM31HK-823	0.082MF	50V	MYLAR
C507	QET51EM-106	10MF	25V	ELECTORO
C508	QET51EM-106	10MF	25V	ELECTORO
C509	QFM31HK-332	3300PF	50V	MYLAR
C510	QFM31HK-332	3300PF	50V	MYLAR
C511	QFM31HK-183	0.018MF	50V	MYLAR
C512	QFM31HK-183	0.018MF	50V	MYLAR
C701	QCS21HJ-680H	68PF	50V	CERAMIC
C702	QCS21HJ-680H	68PF	50V	CERAMIC
C703	QET51HM-225	2.2MF	50V	ELECTORO
C704	QET51HM-225	2.2MF	50V	ELECTORO
C705	QET51AM-476	47MF	10V	ELECTORO
C706	QET51AM-476	47MF	10V	ELECTORO
C707	QCS21HJ-100H	10PF	50V	CERAMIC
C708	QCS21HJ-100H	10PF	50V	CERAMIC

## IC

ITEM	PART NUMBER	DESCRIPTION	
		M A K E R	
IC701	STK4141MK2		SANYO
IC901	TA7317P		TOSHIBA

## Diodes

ITEM	PART NUMBER	DESCRIPTION	
		M A K E R	
D801	S3V20F	SILICON	SHINDENGEN $\Delta$
D802	S3V20F	SILICON	SHINDENGEN $\Delta$
D803	S3V20F	SILICON	SHINDENGEN $\Delta$
D804	S3V20F	SILICON	SHINDENGEN $\Delta$
D805	RD15EB3	SILICON	NEC
D806	RD15EB3	SILICON	NEC
D807	1S2076-31	SILICON	HITACHI
D807	1S2076-31	SILICON	HITACHI
D807	1S2076-31	SILICON	HITACHI
D807	1S2076-31	SILICON	HITACHI

D  
EBS  
F  
G $\Delta$  Safety Parts $\Delta$  Safety Parts

Capacitors

ITEM	PART NUMBER	DESCRIPTION			
C709	QEN51HM-107	100MF	50V	ELECTORO	
C710	QEN51HM-107	100MF	50V	ELECTORO	
C711	QET51HM-107	100MF	50V	ELECTORO	
C712	QET51HM-107	100MF	50V	ELECTORO	
C713	QET51EM-476	47MF	25V	ELECTORO	
C714	QET51EM-476	47MF	25V	ELECTORO	
C715	QFM31HK-473	0.047MF	50V	MYLAR	
C716	QFM31HK-473	0.047MF	50V	MYLAR	
C717	QFM31HK-473	0.047MF	50V	MYLAR	
C717	QFM31HK-473	0.047MF	50V	MYLAR	B
C717	QFM31HK-473	0.047MF	50V	MYLAR	D
C717	QFM31HK-473	0.047MF	50V	MYLAR	EBS
C717	QFM31HK-473	0.047MF	50V	MYLAR	F
C718	QFM31HK-473	0.047MF	50V	MYLAR	G
C718	QFM31HK-473	0.047MF	50V	MYLAR	B
C718	QFM31HK-473	0.047MF	50V	MYLAR	D
C718	QFM31HK-473	0.047MF	50V	MYLAR	EBS
C718	QFM31HK-473	0.047MF	50V	MYLAR	F
C718	QFM31HK-473	0.047MF	50V	MYLAR	G
C721	QCS21HJ-221H	220PF	50V	CERAMIC	
C722	QCS21HJ-221H	220PF	50V	CERAMIC	
C751	QFM31HK-473	0.047MF	50V	MYLAR	
C752	QFM31HK-473	0.047MF	50V	MYLAR	
C753	QFM31HK-473	0.047MF	50V	MYLAR	
C754	QFM31HK-473	0.047MF	50V	MYLAR	
C755	QCS21HJ-271H	270PF	50V	CERAMIC	
C756	QCS21HJ-271H	270PF	50V	CERAMIC	
C759	QCS21HJ-331H	330PF	50V	CERAMIC	
C760	QCS21HJ-331H	330PF	50V	CERAMIC	
C801	QE20072-338	3300MF	50V	ELECTORO	
C802	QE20072-338	3300MF	50V	ELECTORO	
C803	QFM82AK-473	0.047MF	100V	MYLAR	△
C804	QET51EM-106	10MF	25V	ELECTORO	
C805	QFM82AK-473	0.047MF	100V	MYLAR	△
C806	QET51EM-107	100MF	25V	ELECTORO	
C812	QCF21HP-103H	0.01MF	50V	CERAMIC	
C903	QET51HM-226	22MF	50V	ELECTORO	
C904	QET51AM-107	100MF	10V	ELECTORO	
C905	QET51CM-226	22MF	16V	ELECTORO	
C906	QET51HM-105	1MF	50V	ELECTORO	

△ Safety Parts

Resistors

ITEM	PART NUMBER	DESCRIPTION			
R001	QRC128K-275EM	2.7M	1/2W	COMPOSI	△
R001	QRC128K-275EM	2.7M	1/2W	COMPOSI	△
R503	QRD148J-362SN	3.6K	1/4W	CARBON	
R504	QRD148J-362SN	3.6K	1/4W	CARBON	
R505	QRD148J-472SN	4.7K	1/4W	CARBON	
R506	QRD148J-472SN	4.7K	1/4W	CARBON	
R507	QRD148J-821SN	820	1/4W	CARBON	
R508	QRD148J-821SN	820	1/4W	CARBON	
R701	QRD148J-102SN	1K	1/4W	CARBON	
R702	QRD148J-102SN	1K	1/4W	CARBON	
R703	QRD148J-104SN	100K	1/4W	CARBON	
R704	QRD148J-104SN	100K	1/4W	CARBON	
R705	QRD148J-681SN	680	1/4W	CARBON	
R706	QRD148J-681SN	680	1/4W	CARBON	
R707	QRD148J-133SN	13K	1/4W	CARBON	
R708	QRD148J-133SN	13K	1/4W	CARBON	
R709	QRD148J-823SN	8.2K	1/4W	CARBON	
R710	QRD148J-823SN	8.2K	1/4W	CARBON	
R711	QRD148J-222SN	2.2K	1/4W	CARBON	
R712	QRD148J-222SN	2.2K	1/4W	CARBON	
R713	QRD145J-221S	220	1/4W	CARBON	△
R713	QRD145J-221S	220	1/4W	CARBON	△
R713	QRD145J-221S	220	1/4W	CARBON	△
R713	QRZ0062-221	220	1/4W	FUSIBLE	△
R713	QRZ0062-221	220	1/4W	FUSIBLE	△

△ Safety Parts

Resistors

ITEM	PART NUMBER	DESCRIPTION			
R713	QRZ0062-221	220	1/4W	FUSIBLE	△
R713	QRZ0062-221	220	1/4W	FUSIBLE	△
R714	QRD145J-101S	100	1/4W	CARBON	△
R714	QRD145J-101S	100	1/4W	CARBON	△
R714	QRD145J-101S	100	1/4W	CARBON	△
R714	QRZ0062-101	100	1/4W	FUSIBLE	△
R714	QRZ0062-101	100	1/4W	FUSIBLE	△
R714	QRZ0062-101	100	1/4W	FUSIBLE	△
R714	QRZ0062-101	100	1/4W	FUSIBLE	△
R715	QRD148J-222SN	2.2K	1/4W	CARBON	
R716	QRD148J-222SN	2.2K	1/4W	CARBON	
R733	QRX022J-R22AM	0.22	2W	UNF.CARBON	△
R734	QRX022J-R22AM	0.22	2W	UNF.CARBON	△
R739	QRD145J-100S	10	1/4W	CARBON	△
R740	QRD145J-100S	10	1/4W	CARBON	△
R751	QRZ0062-100	10	1/4W	FUSIBLE	△
R752	QRZ0062-100	10	1/4W	FUSIBLE	△
R753	QRZ0062-100	10	1/4W	FUSIBLE	△
R754	QRZ0062-100	10	1/4W	FUSIBLE	△
R797	QRD145J-470S	47	1/4W	CARBON	
R798	QRD145J-470S	47	1/4W	CARBON	
R801	QRG026J-680A	680	2W	O.M.FILM	△
R802	QRG026J-680A	680	2W	O.M.FILM	△
R803	QRD125J-182	1.5K	1/2W	CARBON	△
R804	QRD125J-152	1.5K	1/2W	CARBON	△
R901	QRD148J-152SN	1.5K	1/4W	CARBON	
R902	QRD148J-152SN	1.5K	1/4W	CARBON	
R903	QRD148J-562SN	5.6K	1/4W	CARBON	
R904	QRD148J-562SN	5.6K	1/4W	CARBON	
R905	QRD148J-123SN	12K	1/4W	CARBON	
R906	QRD148J-123SN	12K	1/4W	CARBON	
R907	QRD148J-103SN	10K	1/4W	CARBON	
R908	QRD148J-332SN	3.3K	1/4W	CARBON	
R909	QRD148J-472SN	4.7K	1/4W	CARBON	
R910	QRD148J-563SN	5.6K	1/4W	CARBON	
R911	QRD148J-183SN	18K	1/4W	CARBON	
R912	QRD148J-683SN	68K	1/4W	CARBON	
R913	QRD148J-153SN	15K	1/4W	CARBON	
R914	QRD148J-224SN	220K	1/4W	CARBON	
R915	QRG022J-391AM	390	2W	O.M.FI	
R917	QRD148J-223SN	22K	1/4W	CARBON	
R918	QRD148J-104SN	100K	1/4W	CARBON	
R919	QRD148J-104SN	100K	1/4W	CARBON	
R920	QRD148J-104SN	100K	1/4W	CARBON	
R921	QRD148J-563SN	5.6K	1/4W	CARBON	
R922	QRD148J-820SN	82	1/4W	CARBON	
R931	QRD125J-221	220	1/2W	CARBON	△
R932	QRD125J-221	220	1/2W	CARBON	△
R998	QRD148J-472SN	4.7K	1/4W	CARBON	
VR501	QVZ5206-005			VALIABLE	
VR502	QVZ5206-005			VALIABLE	


△ Safety Parts

## Others

ITEM	PART NUMBER	DESCRIPTION	
	E04365-003	3P SOCKET	
	QMC0437-002	AC OUTLET	△
	QMC0437-002	AC OUTLET	△
	QMC0437-002	AC OUTLET	△
	E45524-002	FUSE CLIP △	
	E45524-002	FUSE CLIP △	
	E67764-203	TERMINAL ASS'Y	
	E65508-002	TAB	
	EMB90TV-801A	SPEAKER TERMINAL	
	EMG7331-001	FUSE CLIP △	
	EMG7331-001	FUSE CLIP △	
	EMG7331-001	FUSE CLIP △	
	EMG7331-001	FUSE CLIP △	
	EMG7331-001	FUSE CLIP △	
	E10950-003	CIRCUIT BOARD	
	E10950-003	CIRCUIT BOARD	
	E10950-003	CIRCUIT BOARD	
	E10950-003	CIRCUIT BOARD	
	E10950-003	CIRCUIT BOARD	
	E10950-003	CIRCUIT BOARD	
	E10950-003	CIRCUIT BOARD	
	E10950-003BS	CIRCUIT BOARD	
	E71140-001	SPRING	
	SBSE3008Z	SCREW	
	E303213-001	HEAT SINK	
P901	E70225-001	EARTH PLATE	
RY901	QMS6302-128	HEAD HONE JACK	
SW001	ESK6D24-213	RELAY	
SW901	QSP2206-001	PUSH SWITCH △	
	QST8261-E02	PUSH SWITCH	

△ Safety Parts

## 4. Packing Materials and Part Numbers

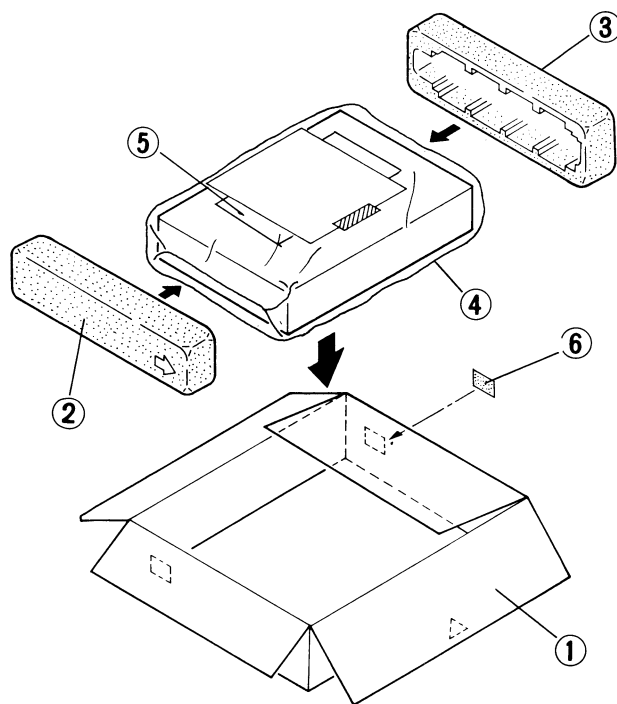

## The Marks for Designated Areas.

J . . . . . U.S.A.	G . . . . . West Germany
C . . . . . Canada	A . . . . . Australia
P.PG . . . U.S. Military	LBS . . . . U.K.
E,LE . . . Europe	U . . . . . Other Countries

No.	Part Name	Part Number	Description
1	Packing Case	PK-RK100E	P. PG. E. G. A. U (E300382-361)
2		PK-RK100LE	J. C. (E300382-366)
3	Fillers (L. R)	NZ-RK100/L	LE. LBS (E300382-368)
4	Protect Seet	E68142-005	J.C.P.PG.E.G.A.LE.U
5	Caution Sheet	E35497-005	LBS
6	Serial Label	E35246-001	P.
		E35246-004	U. PG
		E35246-006	J.C.P.PG.A.LBS.U
			E. LE
			G


## 5. Label


Part Name	Part Number	Area
Number Label	E61029-004	J. C. U. P. PG
Rating Label	E303260-001	E
	E303260-002	E. G
	E303260-003	A
	E303260-004	LE
	E303260-005	LE
UL Label	E303260-006BS	LBS
CSA Label	QZL1001-001	U
Aproval Label	E45858-002	C
	E70027-001	E
FTZ Label	E69177-003	G

### The Marks for Designated Areas.

J	.....	U.S.A.
C	.....	Canada
P,PG	...	U.S. Military
E,LE	...	Europe
G	.....	West Germany
A	.....	Australia
LBS	....	U.K.
U	.....	Other Countries

## 6. Accessories List

Part Name	Part Number	Area
Instruction Book	E30580-1166A	J. C. P. PG. E. LEG. AU
Warranty Card	E30580-1166ABS	LBS
	BT20025F	C
	BT20029C	A
	BT20048A	J. P. PG
ECC Agency	BT20060	LBS
SVC Center	BT20064	G
FTZ Information Card	BT20066	G. LBS
	BT20071	C
	BT20054-005A	G
Service Information Card	BT20046B	J. P. PG
Built-in Antenna	E03614-004	J. C. P. PG. E. A. LE. LBS. U
Wire Antenna Ass'y	E67007-001	G
Siemens Plug	E04506	PG. U
Fuse Label	E67142-T1R6	PG. U (1.6A)
Fuse Primary 	E67142-TR80	P (800 mA)
	QMF51A2-1R6H	PG. U (1.6A 250V)
Envelope (for Instruction Book)	QMF51A2-R80H	P (800 mA 250V)
" (for Warranty Card)	QPGA025-03505	J. C. U. P. PG. E. A. G. LE
" (for Fuse)	E66416-003	
Warning Label	QPGA005-00703	U. P. PG
	E60965-001BS	LBS

 Safety Parts